aiwa

aiwa SERVICE

XR-H1100

SERVICE MANUAL

COMPACT DISC STEREO SYSTEM

• TYPE: EZ, K, HR

SIMPLE MANUAL

TYPE	AMPLIFIER	CASSETTE DECK	GRAPHIC EQUALIZER	CD PLAYER	SPEAKERS
HR	MX-SNH1100	FX-SNH1100	GE-SNH1100	DX-SNH1100	SX-NAVH1200
EZ	MX-NH1100	FX-NH1100	GE-NH1100	DX-NH1100	
K	MX-NH1100	FX-NH1100	GE-NH1100	DX-NH1100	

• Replace this Service Manual with ”Revision Publishing” when it is issued.

S/M Code No. 09–994–411–6T1

ELECTRICAL MAIN PARTS LIST - 1/7 (MX-NH1100/MX-SNH1100)

NOTE: The characters in the suffix column indicate the part usage.

HRJSM .....XX.....A.....
KSM .....XX.....B.....
EZSM .....XX.....C.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
C 209	87-010-071-040		CAP,E 1-50 M 5L SRE	ABC
C 201	87-010-192-080		C-CAP,S 0.022-50 F	ABC
C 207	87-010-194-080		CAP, CHIP 0.047	ABC
C 205	87-010-194-080		CAP, CHIP 0.047	ABC
C 202	87-010-264-040		CAP,E 100-10 5L	ABC
C 206	87-010-405-040		CAP,E 10-50	ABC
C 204	87-010-981-040		CAP,E 22-35 5L SRE	ABC
C 203	87-016-081-080		C-CAP,S 0.1-16 RK	ABC
C 211	87-012-140-080		CAP 470P	ABC
C 222	87-010-401-040		CAP,E 1-50 SME	ABC
C 221	87-016-669-080		C-CAP,S 0.1-25 K B	ABC
C 220	87-016-669-080		C-CAP,S 0.1-25 K B	ABC
C 241	87-010-178-080		CHIP CAP 1000P	ABC
C 248	87-010-192-080		C-CAP,S 0.022-50 F	ABC
C 243	87-010-314-080		C-CAP,S 22P-50V	ABC
C 244	87-010-316-080		C-CAP,S 33P-50 CH	ABC
C 242	87-010-318-080		C-CAP,S 47P-50 CH	ABC
C 247	87-016-669-080		C-CAP,S 0.1-25 K B	ABC
C 251	87-010-197-080		CAP, CHIP 0.01 DM	ABC
C 252	87-010-197-080		CAP, CHIP 0.01 DM	ABC
C 254	87-010-197-080		CAP, CHIP 0.01 DM	ABC
C 253	87-A10-189-040		CAP,E 220-10	ABC
D 201	87-017-931-080		ZENER,MTZJ5.6B	ABC
D 202	87-A40-468-080		C-DIODE,HSM2836CTR	ABC
D 241	87-020-465-080		DIODE,1SS133 (110MA)	ABC
IC 202	87-A20-914-010		IC,SPS-442-1-F	ABC
IC 201	8Z-SP1-605-010		IC,UPD780228GF-034-3BA	ABC
LED 201	87-A40-589-040		LED,SLR-56VCT31 RED	ABC
Q 201	87-A30-087-080		C-FET,2SK2158	ABC
Q 220	87-A30-071-080		C-TR,RT1N 144C	ABC
Q 241	87-026-263-080		C-TR,RN1410	ABC
Q 240	87-A30-074-080		C-TR,RT1P 141C	ABC
SW 201	87-A91-342-010		SW,RTRY EC16B24104W/O D L20	ABC
X 201	87-A70-075-080		VIB,CER 4.19MHZ CRHF	ABC
C 608	87-010-166-080		C-CAP,S 100P-50 SL	ABC
C 604	87-010-166-080		C-CAP,S 100P-50 SL	ABC
C 602	87-010-176-080		C-CAP,S 680P-50 SL	ABC
C 603	87-010-186-080		CAP,CHIP 4700P	ABC
C 605	87-010-321-080		CHIP CAPACITOR,82P(J)	ABC
C 601	87-010-405-040		CAP,E 10-50	ABC
C 606	87-010-490-040		CAP, ELECT 0.1-50	ABC
C 609	87-010-545-040		CAP,E 0.22-50 SME	ABC
C 615	87-010-075-040		CAP,E 10-16 5L	ABC
C 610	87-010-177-080		C-CAP,S 820P-50 SL	ABC
C 614	87-010-248-040		CAP,E 220-10 SME	ABC
C 611	87-010-981-040		CAP,E 22-35 5L SRE	ABC
C 619	87-016-526-080		C-CAP,S 0.47-16 BK	ABC
C 909	87-010-176-080		C-CAP,S 680P-50 SL	ABC
C 905	87-010-176-080		C-CAP,S 680P-50 SL	ABC
C 904	87-010-183-080		C-CAP,S 2700P-50 B	ABC
C 908	87-010-183-080		C-CAP,S 2700P-50 B	ABC
C 901	87-012-141-080		CHIP-CAPACITOR,0.22-16F	ABC
C 902	87-012-141-080		CHIP-CAPACITOR,0.22-16F	ABC
C 903	87-016-526-080		C-CAP,S 0.47-16 BK	ABC
C 907	87-016-552-080		C-CAP,S 0.082-16 B K	ABC
C 906	87-016-552-080		C-CAP,S 0.082-16 B K	ABC
C 916	87-010-184-080		CHIP CAPACITOR 3300P(K)	ABC
C 915	87-010-184-080		CHIP CAPACITOR 3300P(K)	ABC
C 911	87-010-196-080		CHIP CAPACITOR,0.1-25	ABC
C 918	87-010-196-080		CHIP CAPACITOR,0.1-25	ABC
C 919	87-010-264-040		CAP,E 100-10 5L	ABC
C 913	87-010-401-040		CAP,E 1-50 SME	ABC
C 914	87-010-494-040		CAP,E 1-50 GAS	ABC
C 917	87-010-553-040		CAP,E 47-16 GAS	ABC
C 910	87-012-142-080		CAP, S 0.33-16	ABC
C 912	87-016-526-080		C-CAP,S 0.47-16 BK	ABC
C 921	87-010-318-080		C-CAP,S 47P-50 CH	ABC
C 920	87-010-318-080		C-CAP,S 47P-50 CH	ABC
C 922	87-010-318-080		C-CAP,S 47P-50 CH	ABC
CN 901	87-099-201-010		CONN,8P 6216 H	ABC
D 600	87-020-465-080		DIODE,1SS133 (110MA)	ABC
D 901	87-070-136-080		ZENER,MTZJ5.1B	ABC
FB 601	87-008-372-080		FILTER, EMI BL OIRNI	ABC
IC 601	87-017-888-080		IC,NJM4558MD	ABC
IC 901	87-A21-018-040		C-IC,M65849BFP631D	ABC
J 602	87-A60-651-010		JACK,3.5MONO	ABC
J 601	87-A60-651-010		JACK,3.5MONO	ABC
Q 600	87-A30-087-080		C-FET,2SK2158	ABC
C 801	87-010-170-080		S CHIP SL 220P(K)	ABC
C 802	87-010-176-080		C-CAP,S 680P-50 SL	ABC
C 803	87-010-187-080		CAP CHIP S5600P	ABC
C 807	87-010-196-080		CHIP CAPACITOR,0.1-25	ABC
C 804	87-010-213-080		C-CAP,S 0.015-50 B	ABC
C 806	87-010-494-040		CAP,E 1-50 GAS	ABC

ELECTRICAL MAIN PARTS LIST - 2/7 (MX-NH1100/MX-SNH1100)

C	809	87-012-155-080	C-CAP 180P-50CH	ABC
C	810	87-010-264-040	CAP,E 100-10 5L	ABC
C	811	87-010-552-040	CAP,E 22-16 GAS	ABC
C	812	87-010-560-040	CAP,E 10-50 GAS	ABC
C	821	87-010-318-080	C-CAP,S 47P-50 CH	ABC
C	822	87-010-318-080	C-CAP,S 47P-50 CH	ABC
C	823	87-010-318-080	C-CAP,S 47P-50 CH	ABC
D	801	87-017-931-080	ZENER,MTZJ5.6B	ABC
IC	801	87-A21-051-040	C-IC,BU9990-03FS	ABC
L	801	87-A50-093-010	COIL,CLOCK 5.76MHZ	ABC
Q	831	87-A30-075-080	C-TR,2SA1235F	ABC
Q	832	87-A30-087-080	C-FET,2SK2158	ABC
C	503	87-010-180-080	C-CER 1500P	ABC
C	504	87-010-180-080	C-CER 1500P	ABC
C	513	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	514	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	511	87-010-405-080	CAP, ELECT 10-50V	ABC
C	512	87-010-405-080	CAP, ELECT 10-50V	ABC
C	519	87-012-142-080	CAP, S 0.33-16	ABC
C	522	87-010-183-080	C-CAP,S 2700P-50 B	ABC
C	525	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	526	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	521	87-016-083-080	C-CAP,S 0.15-16 RK	ABC
C	520	87-016-669-080	C-CAP,S 0.1-25 K B	ABC
C	523	87-016-669-080	C-CAP,S 0.1-25 K B	ABC
C	535	87-010-195-080	C-CAP,S 0.068-25 F	ABC
C	537	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	533	87-010-263-080	CAP, ELECT 100-10V	ABC
C	532	87-010-263-080	CAP, ELECT 100-10V	ABC
C	538	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	539	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	531	87-010-405-080	CAP, ELECT 10-50V	ABC
C	534	87-010-406-080	CAP, ELECT 22-50	ABC
C	536	87-012-142-080	CAP, S 0.33-16	ABC
C	545	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	540	87-010-320-080	CHIP CAP 68P	ABC
C	542	87-010-320-080	CHIP CAP 68P	ABC
C	541	87-010-320-080	CHIP CAP 68P	ABC
C	548	87-010-401-080	CAP, ELECT 1-50V	ABC
C	547	87-010-401-080	CAP, ELECT 1-50V	ABC
D	532	87-A40-002-080	ZENER,MTZJ5.1C	ABC
D	531	87-A40-438-080	ZENER,MTZJ4.7A	ABC
IC	501	87-A21-202-040	C-IC,M62445AFP	ABC
Q	501	87-026-609-080	TR,KTA1266GR	ABC
Q	505	87-A30-074-080	C-TR,RT1P 141C	ABC
Q	503	87-A30-257-080	C-TR,2SD1306E	ABC
Q	504	87-A30-257-080	C-TR,2SD1306E	ABC
		87-067-703-010	TAPPING SCREW, BVT2+3-10	ABC
C	102	87-010-917-090	CAP,E 3300-50 M SMG	ABC
C	101	87-010-917-090	CAP,E 3300-50 M SMG	ABC
C	105	87-012-368-080	C-CAP,S 0.1-50 F	ABC
C	108	87-012-368-080	C-CAP,S 0.1-50 F	ABC
C	107	87-012-368-080	C-CAP,S 0.1-50 F	ABC
C	106	87-012-368-080	C-CAP,S 0.1-50 F	ABC
C	104	87-016-658-090	CAP,E 4700-35 SMG	ABC
C	103	87-016-658-090	CAP,E 4700-35 SMG	ABC
C	116	87-010-247-080	CAP, ELECT 100-50V	ABC
C	113	87-010-247-080	CAP, ELECT 100-50V	ABC
C	119	87-010-260-080	CAP, ELECT 47-25V	ABC
C	118	87-010-263-080	CAP, ELECT 100-10V	ABC
C	114	87-010-385-080	CAP, ELECT 220-25V	ABC
C	115	87-010-385-080	CAP, ELECT 220-25V	ABC
C	117	87-010-430-080	CAP, ELECT 100-63	ABC
C	124	87-010-112-080	CAP, ELECT 100-16V	ABC
C	121	87-010-174-080	CAP CHIP SL470P (K)	ABC
C	125	87-010-235-080	CAP,E 470-16 SME	ABC
C	123	87-010-247-080	CAP, ELECT 100-50V	ABC
C	120	87-010-403-080	CAP, ELECT 3.3-50V	ABC
C	122	87-010-403-080	CAP, ELECT 3.3-50V	ABC
C	136	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	901	87-010-182-080	C-CAP,S 2200P-50 B	.BC
C	902	87-010-182-080	C-CAP,S 2200P-50 B	.BC
C	908	87-010-190-080	S CHIP F 0.01	ABC
C	907	87-010-190-080	S CHIP F 0.01	ABC
C	909	87-012-368-080	C-CAP,S 0.1-50 F	ABC
C	911	87-010-190-080	S CHIP F 0.01	ABC
C	910	87-012-368-080	C-CAP,S 0.1-50 F	ABC
C	924	87-012-157-080	C-CAP,S 330P-50 CH	ABC
C	925	87-012-157-080	C-CAP,S 330P-50 CH	ABC
CN	123	87-049-469-010	CONN,4P V	ABC
CN	121	87-049-919-010	CONN,3P EH V WHT	ABC
CN	903	87-009-063-010	CONNECTOR 11P	ABC
CN	902	87-009-877-010	CONN,9P FG	ABC
CN	905	87-099-198-010	CONN,10P 6216 V	ABC
CN	901	87-099-719-010	CONN,30P TYK-B(X)	ABC
CN	907	87-A60-057-010	CONN,11P V 9604S-11C	ABC
CN	906	87-A60-058-010	CONN,10P V 9604S-10C	ABC
CN	904	87-A60-575-010	CONN,10P H 52303	ABC
D	102	87-017-447-010	DIODE,GBU4DL	ABC
D	103	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	106	87-070-274-080	DIODE,1N4003 SEM	ABC
D	107	87-070-274-080	DIODE,1N4003 SEM	ABC

ELECTRICAL MAIN PARTS LIST - 3/7 (MX-NH1100/MX-SNH1100)

D	100	87-070-274-080	DIODE,1N4003 SEM	ABC
D	108	87-070-274-080	DIODE,1N4003 SEM	ABC
D	109	87-070-274-080	DIODE,1N4003 SEM	ABC
D	104	87-A40-468-080	C-DIODE,HSM2836CTR	ABC
D	105	87-A40-469-080	C-DIODE,HSM2838CTR	ABC
D	101	87-A40-547-090	DIODE,D5SBA20	ABC
D	113	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	115	87-A40-004-080	ZENER,MTZJ16A	ABC
D	112	87-A40-345-080	ZENER,MTZJ10C	ABC
D	110	87-A40-435-080	ZENER,MTZJ30D	ABC
D	901	87-020-465-080	DIODE,1SS133 (110MA)	ABC
FB	501	87-003-223-010	FERRITE BEAD BLO2RN2	ABC
FB	901	87-008-372-080	FILTER, EMI BL OIRNI	ABC
J	901	87-A60-602-010	JACK,DIA6.3 BLK ST W/SW TC	ABC
J	902	87-A60-617-010	TERMINAL,SP 4P (MSC)	ABC
J	903	87-A60-653-010	JACK,PIN 4P BLK/BLK	ABC
J	905	87-A60-658-010	JACK,PIN 6P WHITE/RED	ABC
L	901	87-003-383-010	COIL,1UH-S	ABC
L	902	87-003-383-010	COIL,1UH-S	ABC
PR	103	87-026-682-080	PROTECTOR,10A 60V491	ABC
PR	104	87-026-682-080	PROTECTOR,10A 60V491	ABC
PR	102	87-A90-195-080	PROTECTOR 7A 125V 49	ABC
PR	101	87-A90-195-080	PROTECTOR 7A 125V 49	ABC
PR	201	87-002-330-080	ICP-N5	ABC
Q	103	87-026-610-080	TR,KTC3198GR	ABC
Q	109	87-A30-075-080	C-TR,2SA1235F	ABC
Q	107	87-A30-075-080	C-TR,2SA1235F	ABC
Q	106	87-A30-076-080	C-TR,2SC3052F	ABC
Q	104	87-A30-076-080	C-TR,2SC3052F	ABC
Q	108	87-A30-076-080	C-TR,2SC3052F	ABC
Q	105	87-A30-083-080	TR,CSD1489B	ABC
Q	102	89-213-702-010	TR,2SB1370 (1.8W)	ABC
Q	101	89-213-702-010	TR,2SB1370 (1.8W)	ABC
Q	111	87-026-609-080	TR,KTA1266GR	ABC
Q	112	87-026-609-080	TR,KTA1266GR	ABC
Q	115	87-026-610-080	TR,KTC3198GR	ABC
Q	114	87-A30-075-080	C-TR,2SA1235F	ABC
Q	110	87-A30-076-080	C-TR,2SC3052F	ABC
Q	901	87-A30-073-080	C-TR,RT1N 141C	ABC
R	909	87-A00-440-050	RES,220-1/2W J RP	ABC
R	911	87-A00-440-050	RES,220-1/2W J RP	ABC
R	910	87-A00-440-050	RES,220-1/2W J RP	ABC
R	912	87-A00-440-050	RES,220-1/2W J RP	ABC
R	914	87-A00-527-080	RES,10-1/4W J NAT	ABC
R	916	87-A00-527-080	RES,10-1/4W J NAT	ABC
R	915	87-A00-527-080	RES,10-1/4W J NAT	ABC
R	913	87-A00-527-080	RES,10-1/4W J NAT	ABC
RY	901	87-A90-713-010	RELAY,12V DQ12D1-OS(M)	ABC
W	101	8Z-SP1-627-010	F-CABLE,7P 2.5 280MM	ABC
WH	101	87-A90-460-010	HLDR,WIRE 2.5-7P	ABC
WH	102	87-A90-460-010	HLDR,WIRE 2.5-7P	ABC
C	201	87-010-322-080	C-CAP,S 100P-50 CH	ABC
C	202	87-010-322-080	C-CAP,S 100P-50 CH	ABC
C	209	87-010-405-080	CAP, ELECT 10-50V	ABC
C	212	87-010-183-080	C-CAP,S 2700P-50 B	ABC
C	211	87-010-183-080	C-CAP,S 2700P-50 B	ABC
C	214	87-010-187-080	CAP CHIP S5600P	ABC
C	213	87-010-187-080	CAP CHIP S5600P	ABC
C	215	87-010-405-080	CAP, ELECT 10-50V	ABC
C	210	87-010-405-080	CAP, ELECT 10-50V	ABC
C	216	87-010-405-080	CAP, ELECT 10-50V	ABC
C	218	87-010-408-080	CAP, ELECT 47-50V	ABC
C	217	87-010-408-080	CAP, ELECT 47-50V	ABC
C	219	87-A10-516-080	C-CAP,S 100P-200 J CH	ABC
C	223	87-010-405-080	CAP, ELECT 10-50V	ABC
C	226	87-010-405-080	CAP, ELECT 10-50V	ABC
C	227	87-010-407-080	CAP, ELECT 33-50V	ABC
C	229	87-010-407-080	CAP, ELECT 33-50V	ABC
C	221	87-016-462-080	C-CAP,S 1-16 F	ABC
C	222	87-016-462-080	C-CAP,S 1-16 F	ABC
C	220	87-A10-516-080	C-CAP,S 100P-200 J CH	ABC
C	231	87-010-186-080	CAP,CHIP 4700P	ABC
C	232	87-010-186-080	CAP,CHIP 4700P	ABC
C	235	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	234	87-010-401-080	CAP, ELECT 1-50V	ABC
C	233	87-010-401-080	CAP, ELECT 1-50V	ABC
C	230	87-010-408-080	CAP, ELECT 47-50V	ABC
C	290	87-010-188-080	CAP,CHIP 6800P	ABC
D	219	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	218	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	217	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	214	87-070-136-080	ZENER,MTZJ5.1B	ABC
D	213	87-070-136-080	ZENER,MTZJ5.1B	ABC
D	212	87-A40-370-090	DIODE,RK46-P20	ABC
D	211	87-A40-370-090	DIODE,RK46-P20	ABC
D	225	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	226	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	227	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	222	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	221	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	220	87-A40-345-080	ZENER,MTZJ10C	ABC
D	224	87-A40-488-080	DIODE,1SS244	ABC

ELECTRICAL MAIN PARTS LIST - 4/7 (MX-NH1100/MX-SNH1100)

D	223	87-A40-488-080	DIODE,1SS244	ABC
D	296	87-020-465-080	DIODE,1SS133 (110MA)	ABC
Q	204	87-A30-075-080	C-TR,2SA1235F	ABC
Q	202	87-A30-257-080	C-TR,2SD1306E	ABC
Q	201	87-A30-257-080	C-TR,2SD1306E	ABC
Q	209	87-A30-268-040	C-TR,2SA1514K(S)	ABC
Q	208	87-A30-268-040	C-TR,2SA1514K(S)	ABC
Q	207	87-A30-268-040	C-TR,2SA1514K(S)	ABC
Q	211	87-A30-076-080	C-TR,2SC3052F	ABC
Q	214	87-A30-076-080	C-TR,2SC3052F	ABC
Q	212	87-A30-076-080	C-TR,2SC3052F	ABC
Q	213	87-A30-076-080	C-TR,2SC3052F	ABC
Q	215	87-A30-190-080	TR,CC5551	ABC
Q	216	87-A30-190-080	TR,CC5551	ABC
Q	210	87-A30-268-040	C-TR,2SA1514K(S)	ABC
Q	227	87-A30-072-080	C-TR,RT1P 144C	ABC
Q	228	87-A30-073-080	C-TR,RT1N 141C	ABC
Q	226	87-A30-075-080	C-TR,2SA1235F	ABC
Q	225	87-A30-076-080	C-TR,2SC3052F	ABC
Q	222	87-A30-106-070	C-TR,CMBT5551	ABC
Q	221	87-A30-106-070	C-TR,CMBT5551	ABC
Q	230	87-A30-075-080	C-TR,2SA1235F	ABC
Q	291	87-A30-074-080	C-TR,RT1P 141C	ABC
Q	290	87-A30-075-080	C-TR,2SA1235F	ABC
Q	295	87-A30-106-070	C-TR,CMBT5551	ABC
R	237	87-A00-262-080	RES,M/F 0.15-2W J	ABC
R	239	87-A00-262-080	RES,M/F 0.15-2W J	ABC
R	238	87-A00-262-080	RES,M/F 0.15-2W J	ABC
R	240	87-A00-262-080	RES,M/F 0.15-2W J	ABC
TH	201	87-A91-081-080	C-THMS,100K-K 20P	ABC
TH	202	87-A91-081-080	C-THMS,100K-K 20P	ABC
		88-SX1-203-210	GUIDE,FL	ABC
*		8Z-SP1-202-010	GUIDE,LED FUN	ABC
C	101	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	302	87-010-404-040	CAP,E 4.7-50 SME	ABC
C	301	87-010-404-040	CAP,E 4.7-50 SME	ABC
C	349	87-010-175-080	CAP 560P	ABC
C	346	87-010-175-080	CAP 560P	ABC
C	341	87-010-175-080	CAP 560P	ABC
C	347	87-010-175-080	CAP 560P	ABC
C	343	87-010-175-080	CAP 560P	ABC
C	348	87-010-175-080	CAP 560P	ABC
C	345	87-010-175-080	CAP 560P	ABC
C	344	87-010-175-080	CAP 560P	ABC
C	342	87-010-175-080	CAP 560P	ABC
C	340	87-010-175-080	CAP 560P	ABC
CN	101	87-099-720-010	CONN,30P TYK-B(P)	ABC
D	305	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	301	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	303	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	304	87-020-465-080	DIODE,1SS133 (110MA)	ABC
D	302	87-020-465-080	DIODE,1SS133 (110MA)	ABC
FL	301	8Z-SP1-617-010	FL,10-BT-218GK	ABC
LED	307	87-A40-589-040	LED,SLR-56VCT31 RED	ABC
LED	306	87-A40-589-040	LED,SLR-56VCT31 RED	ABC
LED	309	87-A40-589-040	LED,SLR-56VCT31 RED	ABC
LED	308	87-A40-589-040	LED,SLR-56VCT31 RED	ABC
LED	302	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABC
LED	303	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABC
LED	305	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABC
LED	304	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABC
LED	301	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABC
LED	310	87-A40-589-040	LED,SLR-56VCT31 RED	ABC
Q	307	87-026-226-080	CHIP-TR,DTA143EK	ABC
Q	303	87-A30-071-080	C-TR,RT1N 144C	ABC
Q	301	87-A30-071-080	C-TR,RT1N 144C	ABC
Q	302	87-A30-071-080	C-TR,RT1N 144C	ABC
Q	304	87-A30-071-080	C-TR,RT1N 144C	ABC
Q	305	87-A30-071-080	C-TR,RT1N 144C	ABC
Q	306	89-112-965-080	TR,2SA1296 (0.75W)	ABC
S	315	87-A90-095-080	SW,TACT EVQ11G04M	ABC
S	314	87-A90-095-080	SW,TACT EVQ11G04M	ABC
S	313	87-A90-095-080	SW,TACT EVQ11G04M	ABC
S	312	87-A90-095-080	SW,TACT EVQ11G04M	ABC
S	311	87-A90-095-080	SW,TACT EVQ11G04M	ABC
C	603	87-010-182-080	C-CAP,S 2200P-50 B	ABC
C	604	87-010-182-080	C-CAP,S 2200P-50 B	ABC
C	605	87-010-369-080	C-CAP,S 0.033-25 K B	ABC
C	606	87-010-369-080	C-CAP,S 0.033-25 K B	ABC
C	609	87-010-374-080	CAP, ELECT 47-10V	ABC
C	602	87-010-401-080	CAP, ELECT 1-50V	ABC
C	601	87-010-401-080	CAP, ELECT 1-50V	ABC
C	607	87-010-405-080	CAP, ELECT 10-50V	ABC
C	608	87-010-405-080	CAP, ELECT 10-50V	ABC
C	612	87-010-112-080	CAP, ELECT 100-16V	ABC
C	613	87-010-173-080	C-CAP,S 390P-50 SL	ABC
C	614	87-010-173-080	C-CAP,S 390P-50 SL	ABC
C	610	87-010-374-080	CAP, ELECT 47-10V	ABC
C	611	87-010-405-080	CAP, ELECT 10-50V	ABC
C	668	87-010-190-080	S CHIP F 0.01	ABC
CN	601	87-099-196-010	CONN,8P 6216 V	ABC
CN	621	87-A60-063-010	CONN,04P V 9604S-04C	.BC

ELECTRICAL MAIN PARTS LIST - 5/7 (MX-NH1100/MX-SNH1100)

IC	601	87-A20-804-040	C-IC,NJM2152M	ABC
C	702	87-010-402-080	CAP, ELECT 2.2-50V	ABC
C	701	87-010-402-080	CAP, ELECT 2.2-50V	ABC
C	709	87-010-956-080	CHIP-CAP,S 0.068-25B	ABC
C	707	87-012-365-080	C-CAP,S 0.027-25VBK	ABC
C	708	87-012-365-080	C-CAP,S 0.027-25VBK	ABC
C	705	87-016-460-080	C-CAP,S 0.22-16 B	ABC
C	706	87-016-460-080	C-CAP,S 0.22-16 B	ABC
C	704	87-016-669-080	C-CAP,S 0.1-25 K B	ABC
C	703	87-016-669-080	C-CAP,S 0.1-25 K B	ABC
C	719	87-010-178-080	CHIP CAP 1000P	ABC
C	715	87-010-183-080	C-CAP,S 2700P-50 B	ABC
C	716	87-010-183-080	C-CAP,S 2700P-50 B	ABC
C	717	87-010-188-080	CAP,CHIP 6800P	ABC
C	718	87-010-188-080	CAP,CHIP 6800P	ABC
C	711	87-010-197-080	CAP, CHIP 0.01 DM	ABC
C	712	87-010-197-080	CAP, CHIP 0.01 DM	ABC
C	713	87-010-198-080	CAP, CHIP 0.022	ABC
C	714	87-010-198-080	CAP, CHIP 0.022	ABC
C	710	87-010-956-080	CHIP-CAP,S 0.068-25B	ABC
C	720	87-010-178-080	CHIP CAP 1000P	ABC
C	721	87-010-182-080	C-CAP,S 2200P-50 B	ABC
C	722	87-010-182-080	C-CAP,S 2200P-50 B	ABC
C	731	87-010-112-080	CAP, ELECT 100-16V	ABC
C	738	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	735	87-010-322-080	C-CAP,S 100P-50 CH	ABC
C	736	87-010-322-080	C-CAP,S 100P-50 CH	ABC
C	737	87-010-322-080	C-CAP,S 100P-50 CH	ABC
C	730	87-010-404-080	CAP, ELECT 4.7-50V	ABC
IC	701	87-A20-869-040	C-IC,M62449FP	ABC
C	701	87-010-260-080	CAP, ELECT 47-25V	ABC
C	702	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	709	87-012-195-080	C-CAP,U 100P-50CH	ABC
C	703	87-012-286-080	CAP, U 0.01-25	ABC
C	704	87-012-286-080	CAP, U 0.01-25	ABC
C	712	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	711	87-010-263-080	CAP, ELECT 100-10V	ABC
C	719	87-012-286-080	CAP, U 0.01-25	ABC
C	714	87-012-286-080	CAP, U 0.01-25	ABC
C	717	87-012-286-080	CAP, U 0.01-25	ABC
C	713	87-012-286-080	CAP, U 0.01-25	ABC
C	727	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	728	87-010-248-080	CAP, ELECT 220-10V	ABC
C	721	87-012-176-080	CAP 15P	ABC
C	722	87-012-176-080	CAP 15P	ABC
C	725	87-012-274-080	CHIP CAP,U 1000P-50B	ABC
C	723	87-012-274-080	CHIP CAP,U 1000P-50B	ABC
CN	601	87-099-028-010	CONN,11P 6216 H	ABC
D	722	87-020-465-080	DIODE,1SS133 (110MA)	.BC
D	721	87-A40-234-080	ZENER,MTZJ5.6A	ABC
IC	721	87-070-127-110	IC,LC72131 D	ABC
Q	711	87-A30-196-080	TR,2SC4115SRS	ABC
X	721	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309	ABC
C	758	87-012-167-080	C-CAP,U 5P-50 CH	ABC
C	757	87-012-188-080	C-CAP,U 47P-50 CH	ABC
C	753	87-012-195-080	C-CAP,U 100P-50CH	.BC
C	769	87-010-260-080	CAP, ELECT 47-25V	ABC
C	769	87-010-408-080	CAP, ELECT 47-50V	...
C	763	87-010-829-080	CAP, U 0.047-16	ABC
C	764	87-012-337-080	C-CAP,U 56P-50 CH	A..
C	773	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC
C	774	87-010-263-080	CAP, ELECT 100-10V	ABC
C	771	87-010-383-080	CAP, ELECT 33-25V	...
C	777	87-010-400-080	CAP, ELECT 0.47-50V	ABC
C	779	87-010-401-080	CAP, ELECT 1-50V	ABC
C	778	87-010-401-080	CAP, ELECT 1-50V	ABC
C	775	87-010-404-080	CAP, ELECT 4.7-50V	ABC
C	771	87-010-407-080	CAP, ELECT 33-50V	ABC
C	770	87-010-829-080	CAP, U 0.047-16	ABC
C	772	87-010-829-080	CAP, U 0.047-16	ABC
C	773	87-015-785-080	CHIP CAPACITOR, 0.1FZ-25Z	ABC
C	782	87-010-405-080	CAP, ELECT 10-50V	ABC
C	781	87-010-405-080	CAP, ELECT 10-50V	ABC
C	785	87-010-805-080	CAP, S 1-16	ABC
C	786	87-010-805-080	CAP, S 1-16	ABC
C	789	87-012-275-080	C-CAP,U 1200P-50 B	ABC
C	788	87-012-280-080	CAP, U 3300P-50	A..
C	787	87-012-280-080	CAP, U 3300P-50	A..
C	787	87-012-282-080	CAP, U 4700P-50	.BC
C	788	87-012-282-080	CAP, U 4700P-50	.BC
C	783	87-012-286-080	CAP, U 0.01-25	ABC
C	796	87-010-403-080	CAP, ELECT 3.3-50V	ABC
C	791	87-010-405-080	CAP, ELECT 10-50V	ABC
C	794	87-010-406-080	CAP, ELECT 22-50	ABC
C	795	87-010-596-080	CAP, S 0.047-16	...
C	799	87-010-829-080	CAP, U 0.047-16	ABC
C	793	87-012-273-080	C-CAP,U 820P-50 B	A..
C	793	87-012-275-080	C-CAP,U 1200P-50 B	ABC
C	790	87-012-275-080	C-CAP,U 1200P-50 B	ABC
C	798	87-012-276-080	CAP, CHIP SS 1500 PBK	ABC
C	797	87-012-276-080	CAP, CHIP SS 1500 PBK	ABC
C	798	87-012-278-080	C-CAP,U 2200P-50 B	...

ELECTRICAL MAIN PARTS LIST - 6/7 (MX-NH1100/MX-SNH1100)

C	797	87-012-278-080	C-CAP,U 2200P-50 B	.....
C	795	87-A10-504-080	C-CAP,U 0.047-16 K B	ABC.....
D	771	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
IC	771	87-A20-913-010	IC,LA1837NL	ABC.....
L	771	87-A50-266-010	COIL,FM DET-2N(TOK)	ABC.....
L	772	87-A90-052-010	FLTR,CFMT-450A(TOK)	A.....
L	772	87-A90-733-010	FLTR,PCFAZH-450 (TOK)	.BC.....
L	781	87-005-847-080	COIL,2.2UH(CECS)	ABC.....
L	792	87-A50-027-010	COIL,1 POLE MPX(TOK)	ABC.....
L	791	87-A50-027-010	COIL,1 POLE MPX(TOK)	ABC.....
L	791	87-A50-209-010	COIL,1POLE MPX(MIT)	.....
L	792	87-A50-209-010	COIL,1POLE MPX(MIT)	.....
X	771	87-030-354-010	VIB,CF BFU 450C	A.....
C	859	87-012-286-080	CAP, U 0.01-25	.BC.....
C	865	87-010-196-080	CHIP CAPACITOR,0.1-25	.BC.....
C	866	87-010-405-080	CAP, ELECT 10-50V	.BC.....
C	864	87-010-405-080	CAP, ELECT 10-50V	.BC.....
C	869	87-012-180-080	C-CAP,U 22P-50 CH	.BC.....
C	868	87-012-184-080	C-CAP,U 33P-50 CH	.BC.....
C	862	87-012-266-080	C-CAP,U 220P-50 B	.BC.....
C	861	87-012-266-080	C-CAP,U 220P-50 B	.BC.....
C	863	87-012-270-080	CAP, U 470P-50	.BC.....
C	867	87-012-286-080	CAP, U 0.01-25	.BC.....
CN	602	87-099-211-010	CONN,4P 6216V	.BC.....
IC	851	87-A20-440-040	C-IC,BU1920FS	.BC.....
Q	853	87-A30-076-080	C-TR,2SC3052F	.BC.....
X	851	87-A70-091-010	VIB,XTAL 4.332MHZ CSA-309	.BC.....
C	818	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	819	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	812	87-012-286-080	CAP, U 0.01-25	ABC.....
C	814	87-012-286-080	CAP, U 0.01-25	ABC.....
C	829	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	828	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	820	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	820	87-010-408-080	CAP, ELECT 47-50V	.....
C	823	87-012-286-080	CAP, U 0.01-25	ABC.....
C	822	87-012-286-080	CAP, U 0.01-25	ABC.....
C	821	87-012-286-080	CAP, U 0.01-25	ABC.....
C	944	87-010-575-080	C-CAP,S 560P-50 UJ	A.....
C	942	87-012-172-080	CAPACITOR CHIP U 10P CH	.BC.....
C	941	87-012-182-080	C-CAP,U 27P-50 CH	A.....
C	949	87-A10-039-080	C-CAP,U 470P-50 J CH	.BC.....
C	959	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	956	87-010-263-080	CAP, ELECT 100-10V	A.....
C	954	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	950	87-A10-913-080	C-CAP, 4700P-50 J CH	A.....
C	960	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	962	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	961	87-012-170-080	C-CAP,U 8P-50 CH	A.....
CF	802	82-785-747-010	CF MS2 GHY R	.BC.....
CF	801	87-008-261-010	FILTER, SFE10.7MA5-A	A.....
CF	802	87-008-261-010	FILTER, SFE10.7MA5-A	A.....
CF	801	87-008-423-010	CERAMIC FILTER, SFE10.7	.BC.....
D	944	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	942	87-A40-270-080	C-DIODE,MC2838	.BC.....
FFE	801	A8-6ZA-191-130	6ZA-1 FEENM	.BC.....
FFE	801	A8-8ZA-190-030	8ZA-1 FEUNM	A.....
J	802	87-033-241-010	TERMINAL,ANT AJ-2039	.BC.....
J	801	87-A60-657-010	TERMINAL,4P HSP-154V5-02	A.....
J	940	81-754-629-010	CONNECTOR, 2P	A.....
L	832	87-005-847-080	COIL,2.2UH(CECS)	ABC.....
L	943	87-005-372-080	COIL S 1MHM	A.....
L	942	87-A50-019-010	COIL,OSC LW(COI)	.BC.....
L	941	87-A50-020-010	COIL,ANT LW(COI)	.BC.....
L	941	87-A50-022-010	COIL,ANT SW(COI)	A.....
L	944	87-A50-159-010	COIL,10MH K C2B	A.....
L	942	87-A50-173-010	COIL,OSC SW-N(COI)	A.....
L	981	87-NF4-650-010	COIL,AM PACK 4N(TOK)	.....
L	981	87-NF4-651-110	COIL,AM PACK2N(TOM)	.BC.....
L	981	88-NF8-625-110	COIL,AM PACK3N(TOK)	A.....
Q	806	87-A30-072-080	C-TR,RT1P 144C	ABC.....
Q	805	89-327-143-080	TR,2SC2714 (0.1W)	ABC.....
Q	942	87-A30-075-080	C-TR,2SA1235F	A.....
Q	943	87-A30-075-080	C-TR,2SA1235F	A.....
Q	949	87-A30-076-080	C-TR,2SC3052F	A.....
Q	945	87-A30-076-080	C-TR,2SC3052F	A.....
Q	944	87-A30-076-080	C-TR,2SC3052F	A.....
Q	948	87-A30-086-070	C-TR,CSD1306E	ABC.....
Q	947	89-503-602-080	C-FET,2SK360E	ABC.....
Q	951	87-A30-074-080	C-TR,RT1P 141C	ABC.....
TC	942	87-011-164-010	CAPACITOR,TRIMMER 30P	ABC.....
TC	941	87-011-173-010	CERAMIC TRIMMER 20P	A.....
C	952	87-010-263-080	CAP, ELECT 100-10V	ABC.....
C	953	87-010-380-080	CAP, ELECT 47-16V	ABC.....
C	951	87-010-401-080	CAP, ELECT 1-50V	ABC.....
CN	951	87-A60-109-010	CONN,2P V S2M-2W	ABC.....
D	952	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
D	951	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
Q	952	87-026-609-080	TR,KTA1266GR	ABC.....
Q	951	87-A30-076-080	C-TR,2SC3052F	ABC.....
C	138	87-010-387-080	CAP,E 470-25 SME	ABC.....
C	141	87-A10-480-090	CAP,CER 4700P-250 M E KH	ABC.....

ELECTRICAL MAIN PARTS LIST - 7/7 (MX-NH1100/MX-SNH1100)

D	116	87-070-345-080	DIODE,IN4148	ABC.....
D	117	87-070-345-080	DIODE,IN4148	ABC.....
D	118	87-070-345-080	DIODE,IN4148	ABC.....
D	119	87-070-345-080	DIODE,IN4148	ABC.....
D	121	87-070-345-080	DIODE,IN4148	ABC.....
D	120	87-070-345-080	DIODE,IN4148	ABC.....
D	122	87-070-345-080	DIODE,IN4148	ABC.....
PT	102	8Z-NF8-662-010	PT,SUB ZNF-8(E)	.BC.....
PT	102	8Z-NF8-663-010	PT,SUB ZNF-8(H)	A.....
Q	101	87-026-245-080	TR,DTC114ES	ABC.....
RY	102	87-A90-976-010	RELAY,AC12V SDT-S-112LMR	.BC.....
RY	101	87-A91-281-010	RELAY,AC DC12V OSA-SS-212DM5	A.....
S	101	87-036-173-010	SW,SL 2-2-4 SDKG(*)	A.....
T	101	87-A60-317-010	TERMINAL, 1P MSC	ABC.....
T	102	87-A60-317-010	TERMINAL, 1P MSC	ABC.....

SCHEMATIC DIAGRAM – 1 (MX-NH1100/MX-SNH1100 : MAIN)

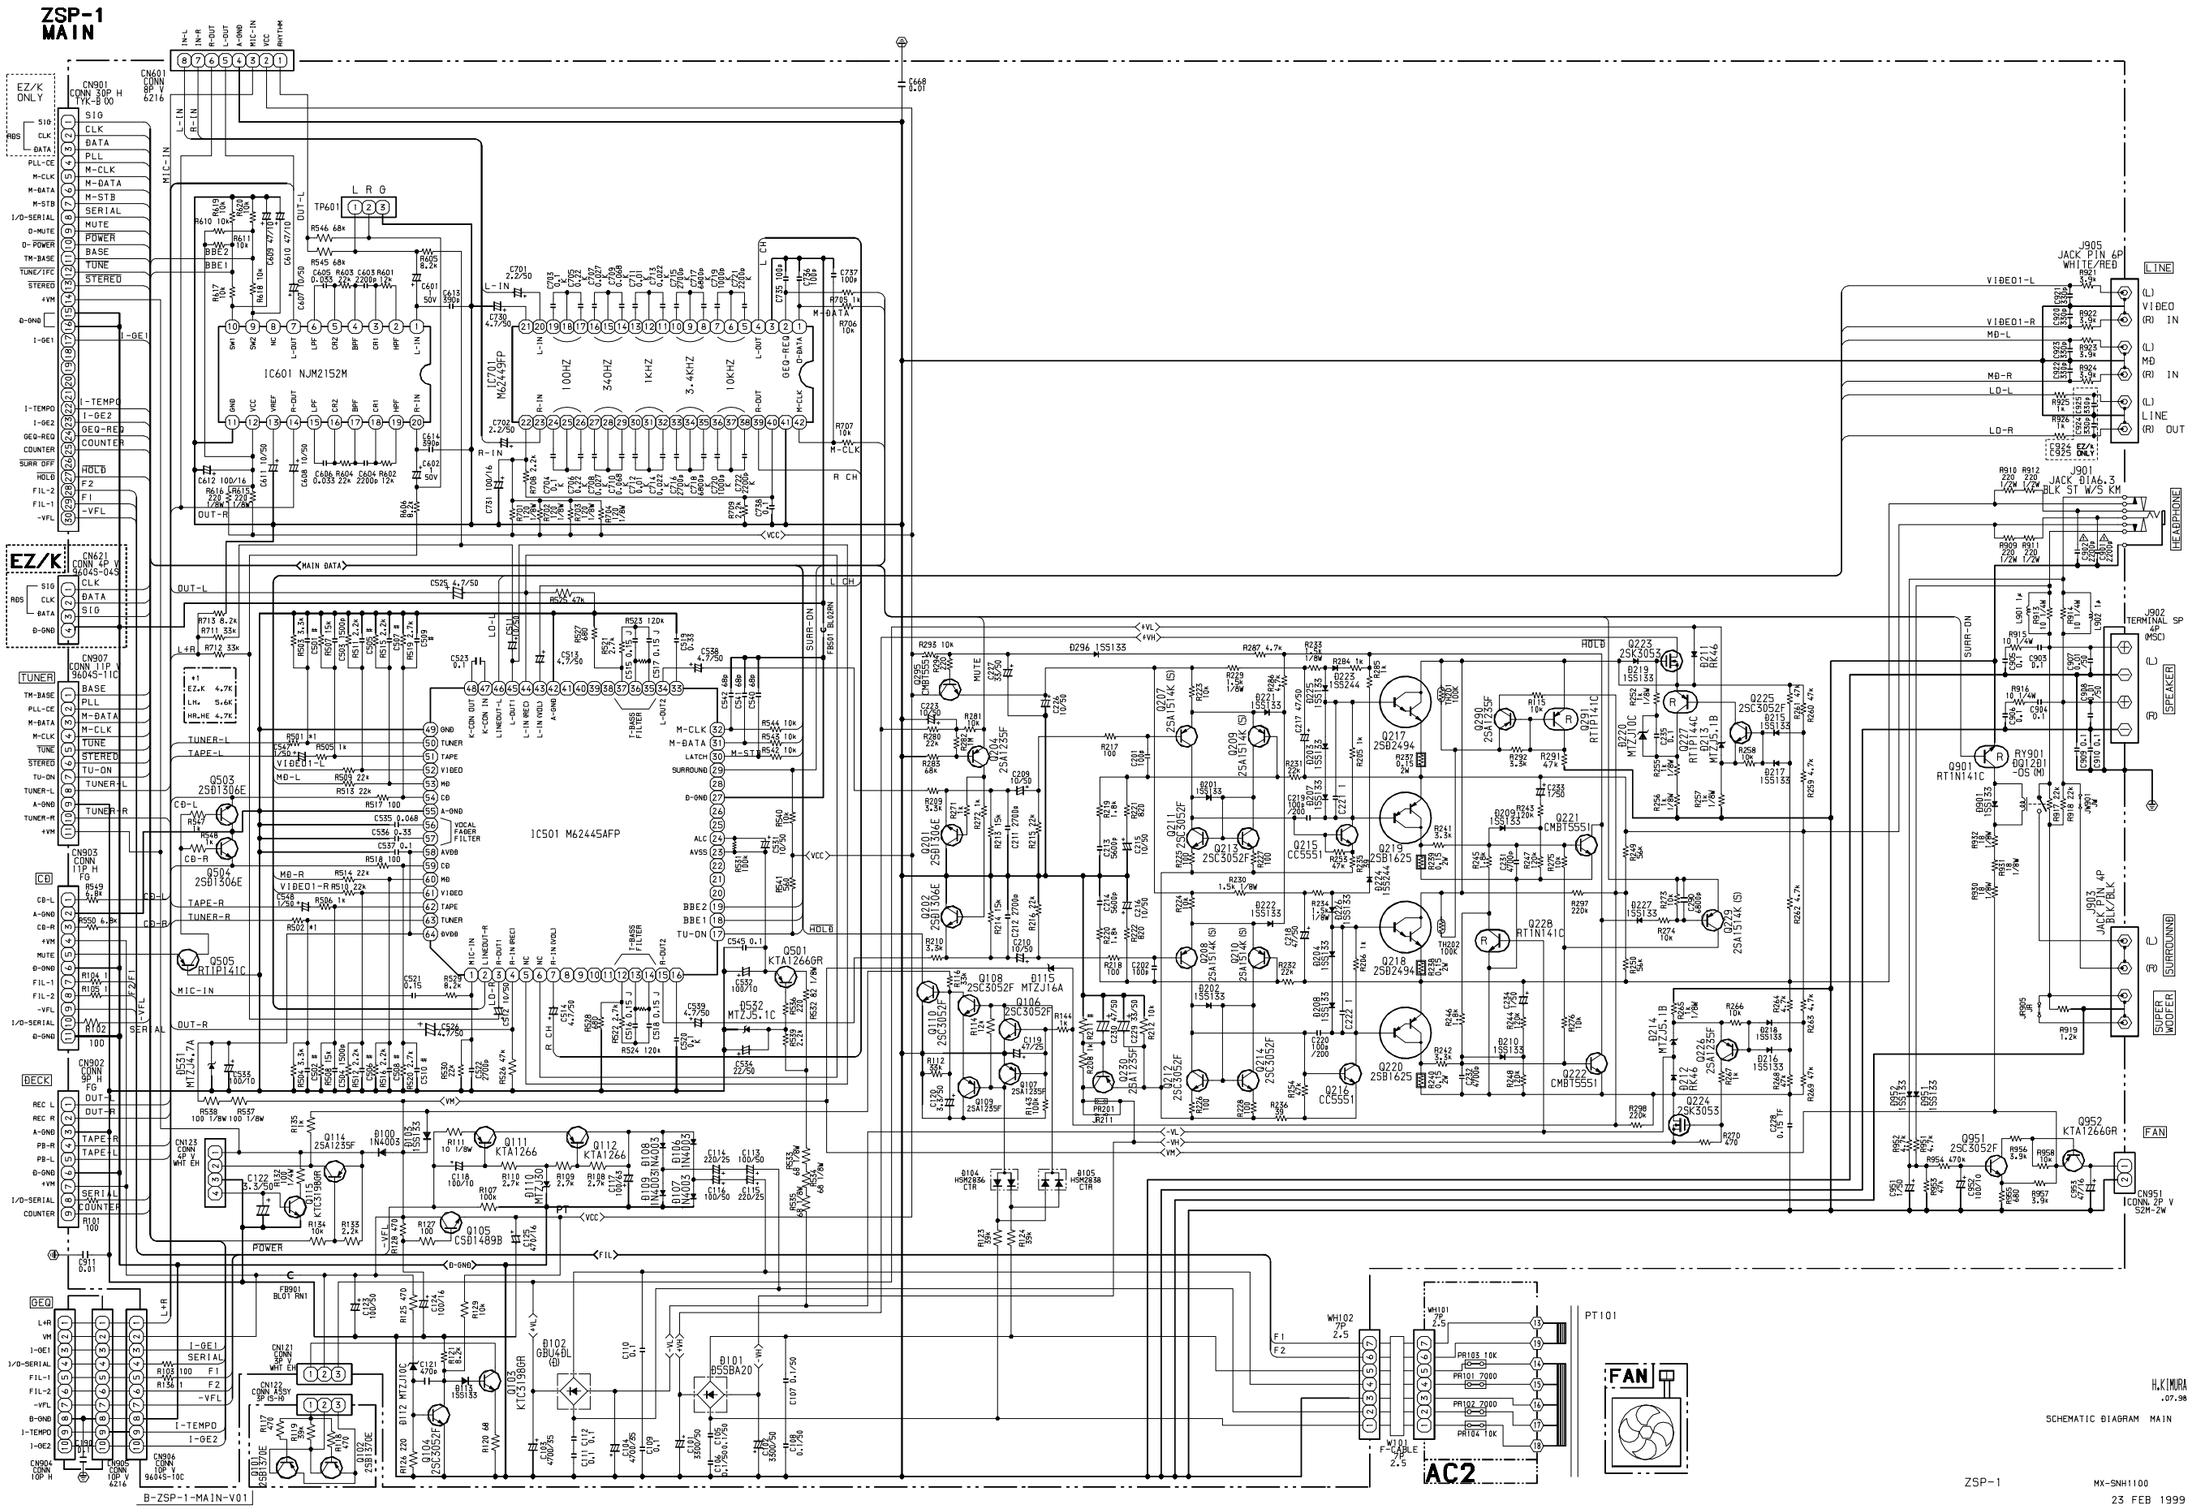

SCHEMATIC DIAGRAM – 2 (MX-NH1100/MX-SNH1100 : FRONT)

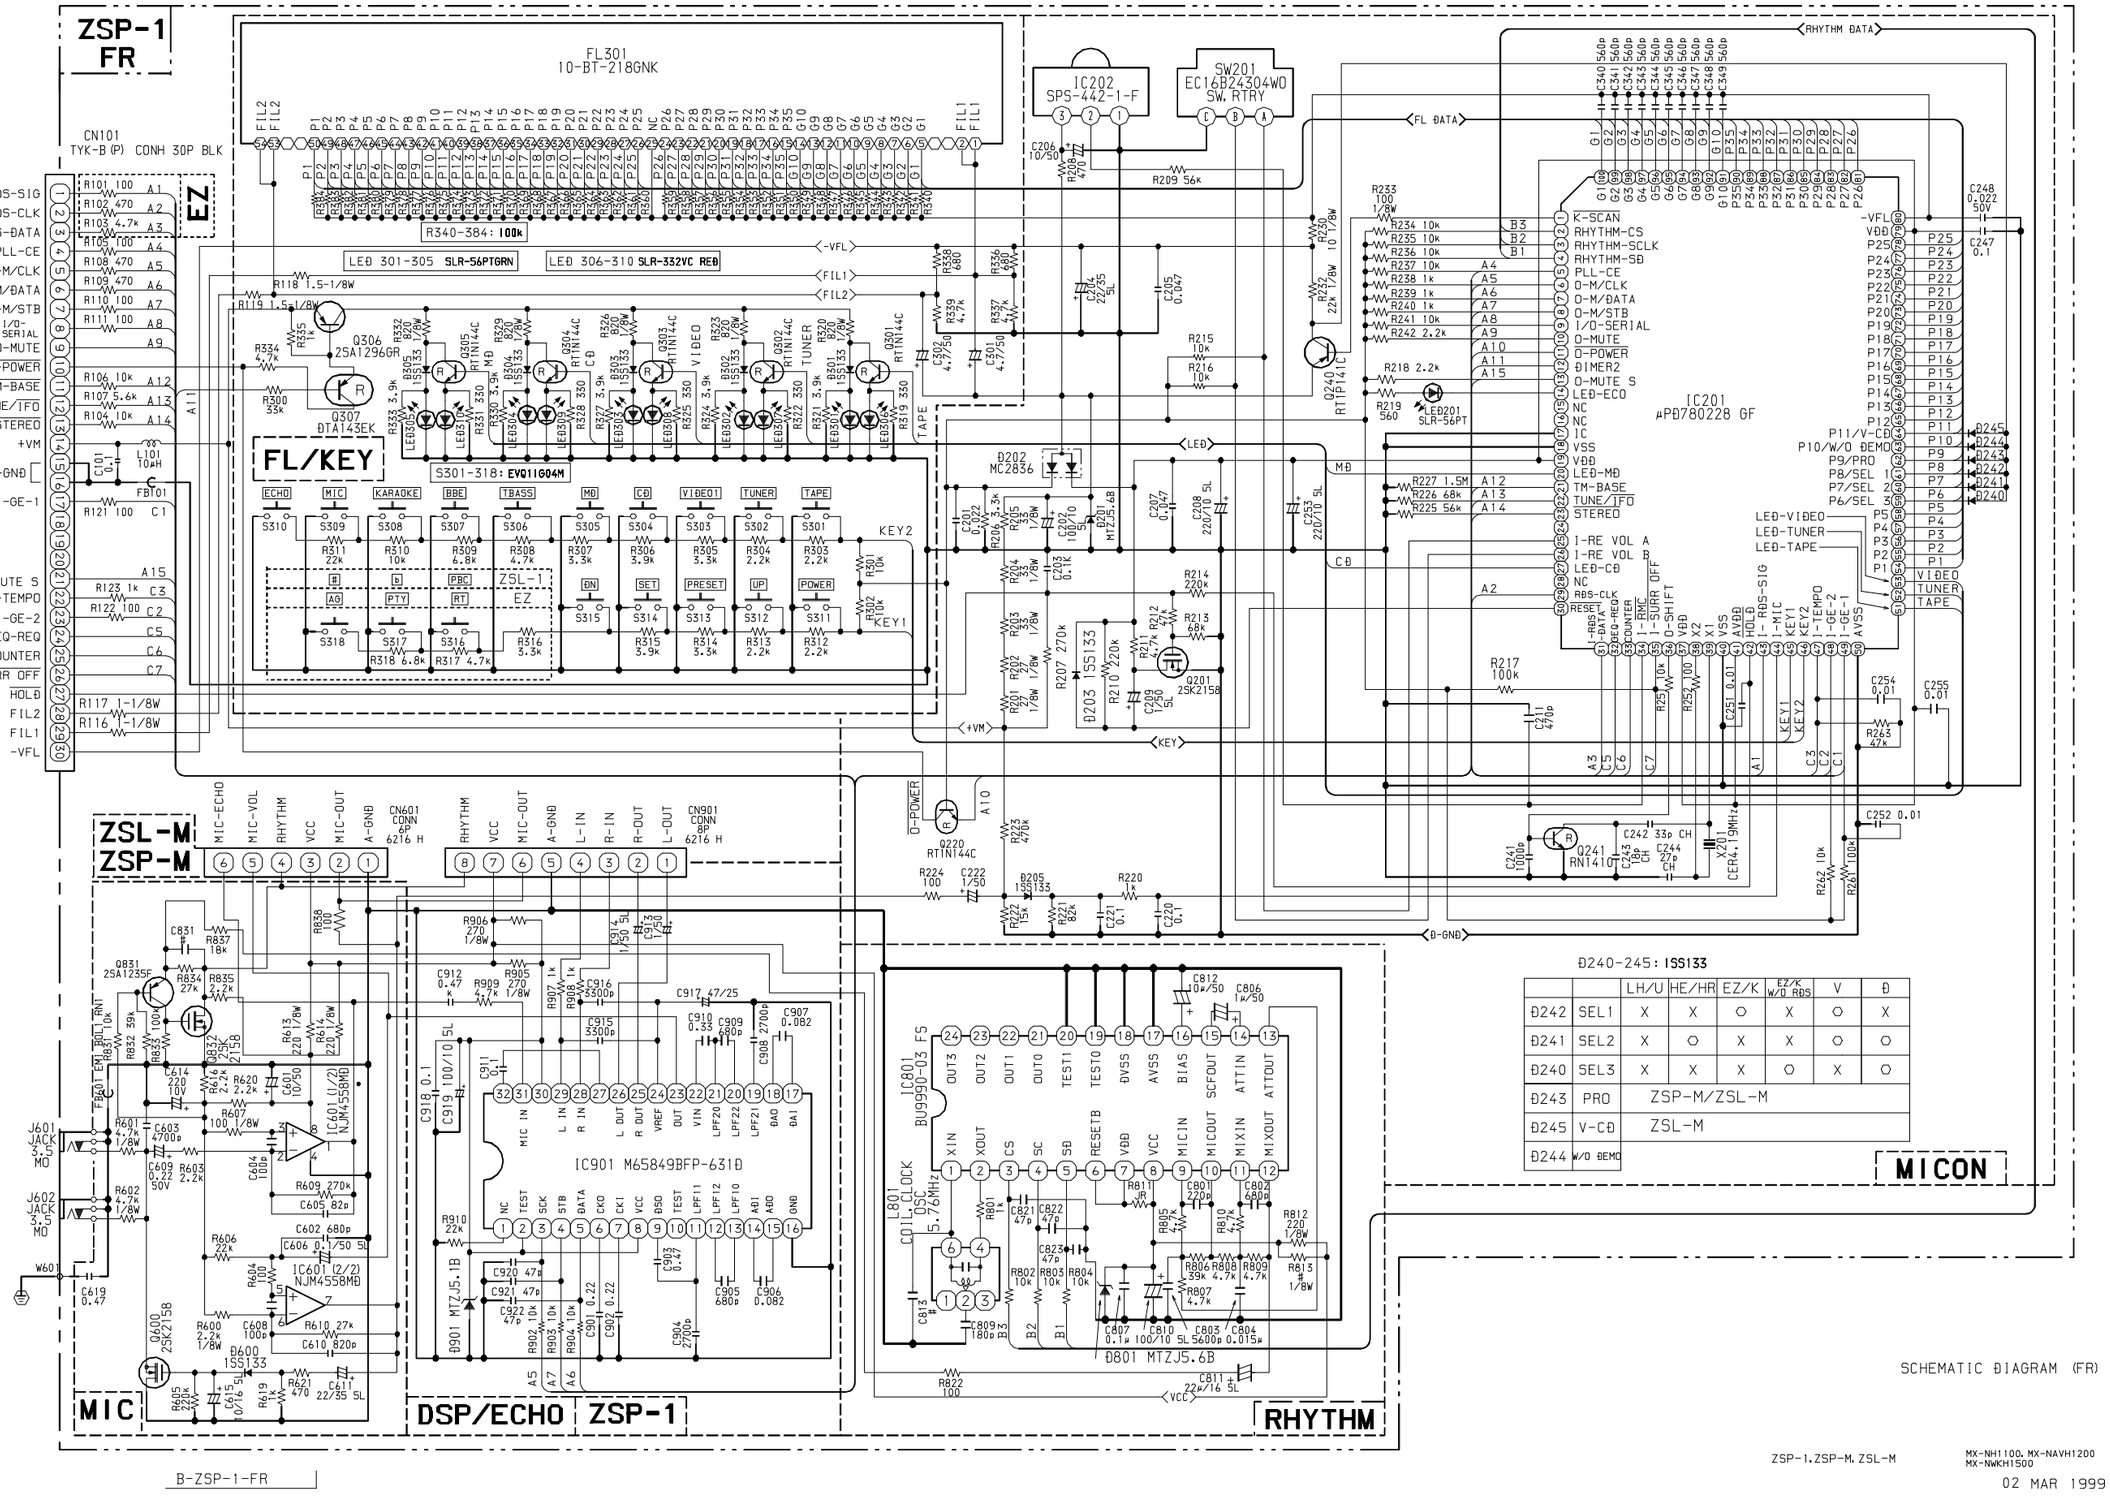

SCHEMATIC DIAGRAM – 3 (MX-NH1100 : TUNER<EZ,K>)

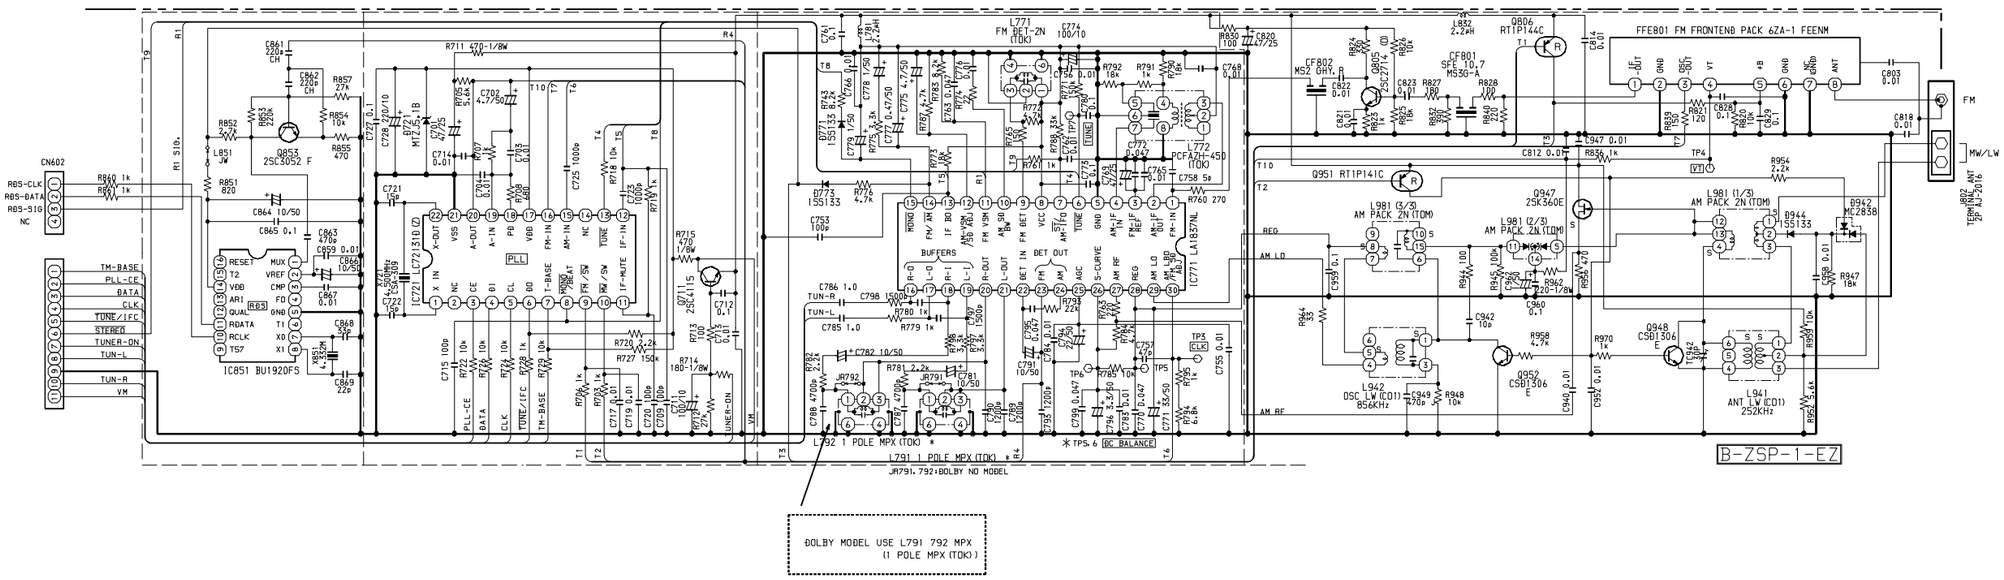

DOLBY MODEL USE L791 792 MPX
(1 POLE MPX (TOK))

B-ZSP-1-EZ

SCHEMATIC DIAGRAM TUNNER (EZ)

ZSP-1 MX-NH1100
10 02 99

SCHEMATIC DIAGRAM – 4 (MX-SNH1100 : TUNER<HR>)

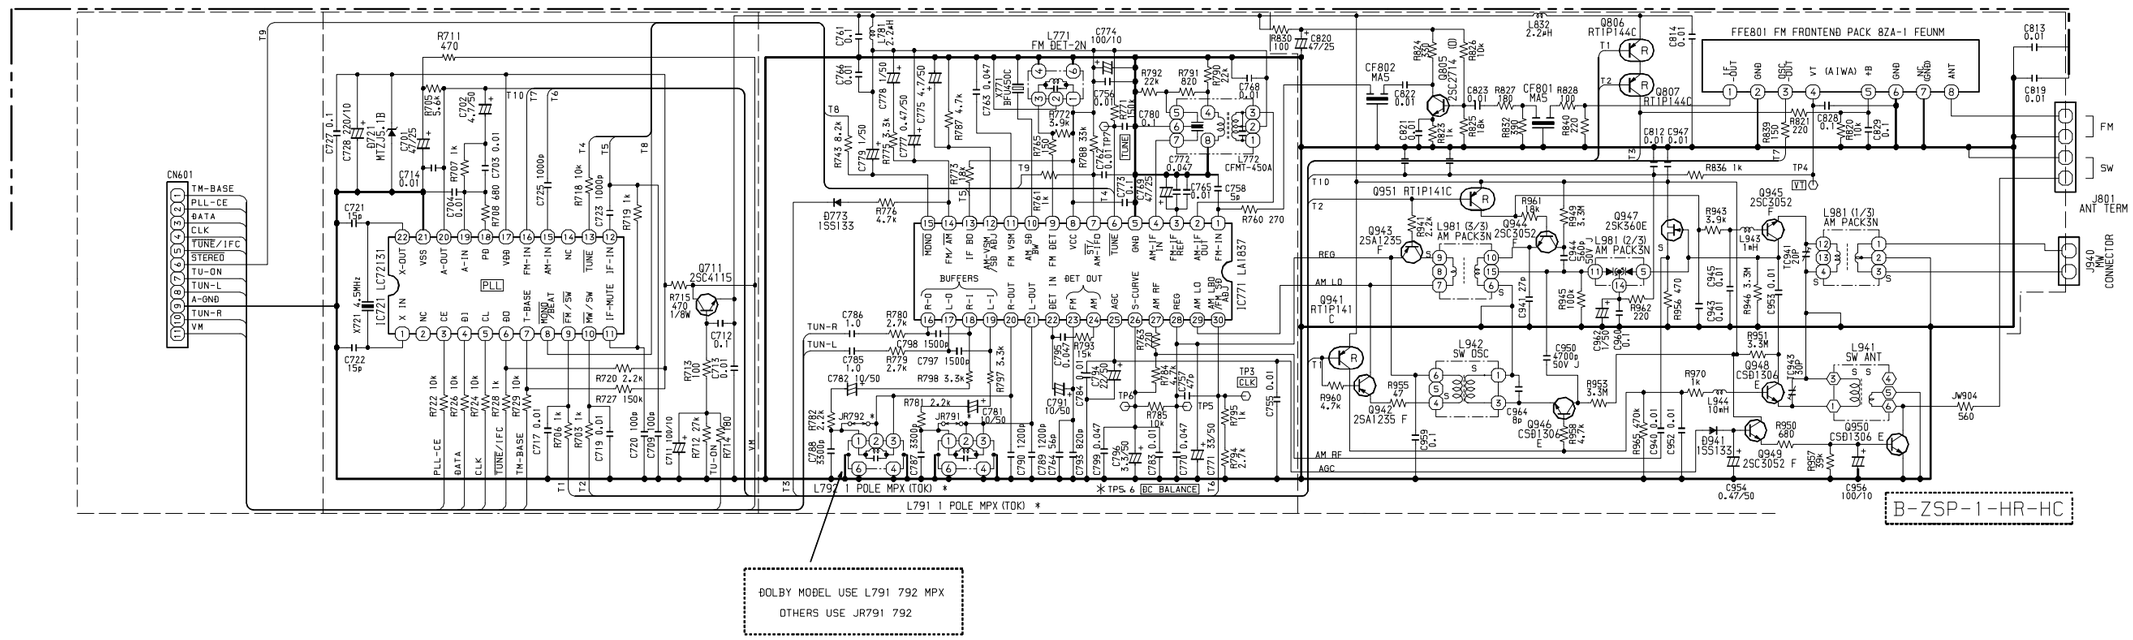

ĐOLBY MODEL USE L791 792 MPX
OTHERS USE JR791 792

(HR/HC)
SCHEMATIC DIAGRAM

ZSP-1 MX-NH1100
10 02 99

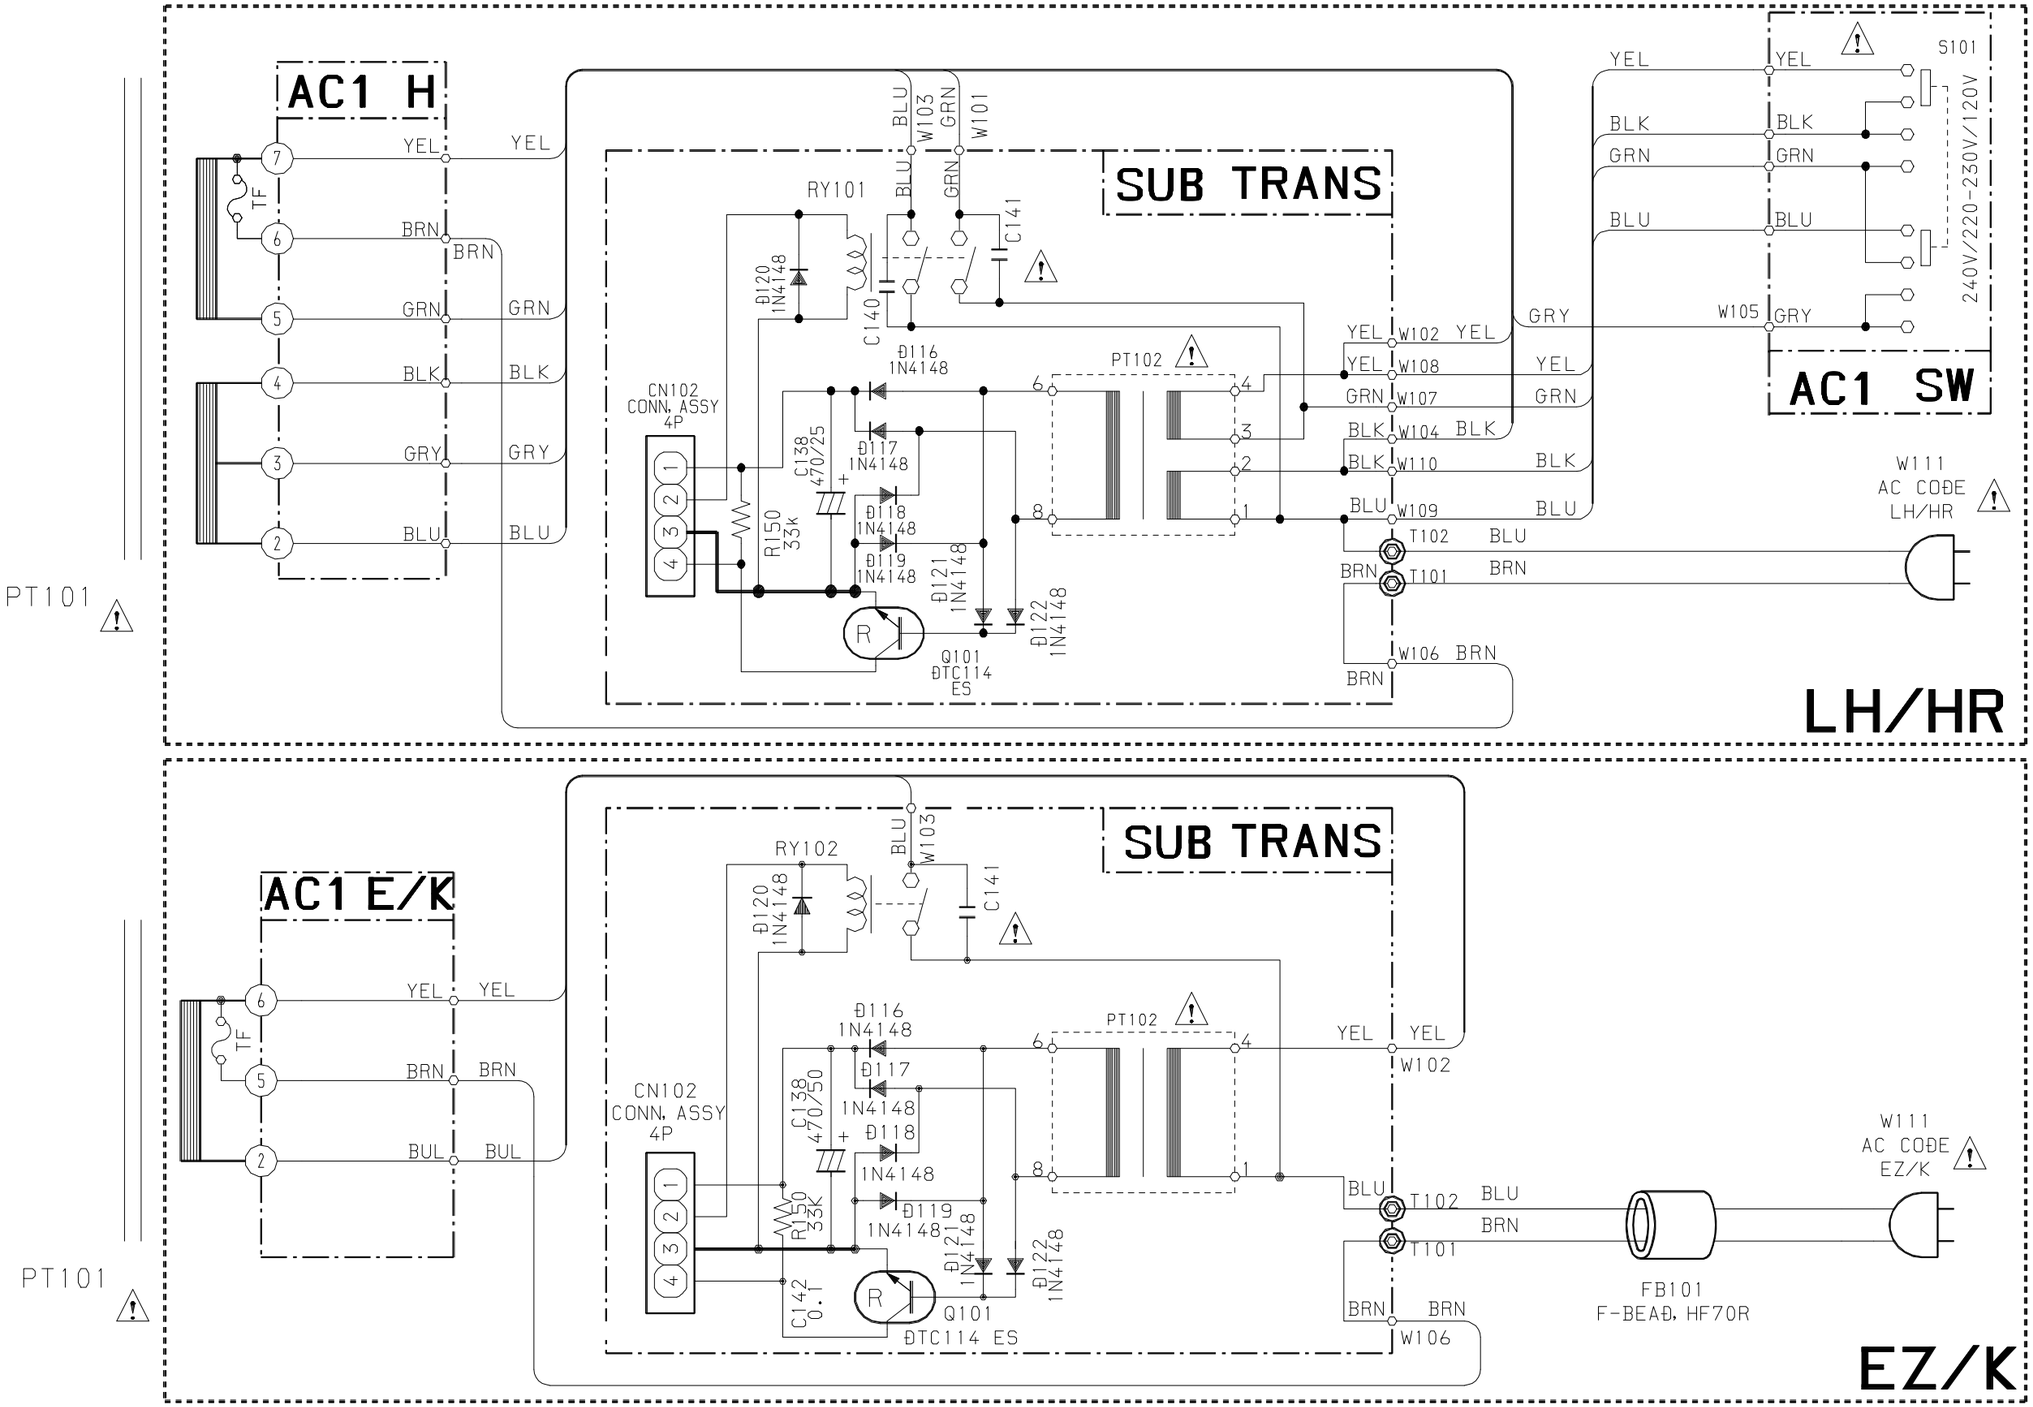
AC1 H
PT101
TF
YEL
BRN
GRN
BLK
GRY
BLU
SUB TRANS
RY101
D120 1N4148
C140
C141
W103
W101
D116 1N4148
D117 1N4148
D118 1N4148
D119 1N4148
D121 1N4148
D122 1N4148
CN102 CONN. ASSY 4P
C138 470/25
R150 33k
Q101 DTC114 ES
PT102
W102
W108
W107
W104
W110
W109
T102
T101
W106
S101
240V/220-230V/120V
AC1 SW
W105
W111 AC CODE LH/HR
LH/HR
AC1 E/K
RY102
C142 0.1
FB101 F-BEAD, HF70R
W111 AC CODE EZ/K
EZ/K

MECHANICAL PARTS LIST - 1/1 (MX-NH1100/MX-SNH1100)

NOTE: The characters in the suffix column indicate the part usage.

HRJSM	XX	A
KSM	XX	B
EZSM	XX	C

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	82-NE6-067-010		BADGE,AIWA 30N	
	87-B00-002-010		BADGE,AIWA 30 ABS SIL	ABC
	8Z-SP1-001-010		CABI,FR	A
	8Z-SP1-002-010		CABI,STEEL	ABC
	8Z-SP1-003-010		PANEL,REAR HR	A
	8Z-SP1-017-010		PANEL,SIDE L	ABC
	8Z-SP1-018-010		PANEL,SIDE R	ABC
	8Z-SP1-021-010		CABI,FR EZ	.BC
	8Z-SP1-022-010		PANEL,REAR EZSNM	..C
	8Z-SP1-024-010		PANEL,REAR LHSNM	
	8Z-SP1-026-010		PANEL,REAR KSNM	.B
	8Z-SP1-027-010		CABI,STEEL LH	
	8Z-SP1-007-010		KEY,BBE	ABC
	8Z-SP1-008-010		KEY,KARAOKE	A
	8Z-SP1-010-010		KEY,ASSY FUN	ABC
	8Z-SP1-011-010		KNOB,RTRY VOL	ABC
	8Z-SP1-012-010		RING,VOL	ABC
	8Z-SP1-015-010		REFLECTOR,ECO	ABC
	8Z-SP1-016-010		KEY,RDS	.BC
	8Z-SP1-004-010		WINDOW,DISPLAY	A
	8Z-SP1-028-010		WINDOW,DISPLAY EZ	.BC
	87-085-213-010		FOOT,H12.5	ABC
	88-AR1-203-010		HLDR,TU	ABC
	8Z-NB8-240-010		COVER, PL	ABC
	8Z-SP1-207-010		COVER, FAN	ABC
	8Z-SP1-208-010		HLDR,PWB 13.5	ABC
	8Z-SP1-209-010		HLDR,PWB ECO	ABC
	81-653-215-010		SPECIAL SCREW, VT2.6-8	A
	87-067-641-010		UTT2+3-8(W/O SLOT)BL	ABC
	87-067-688-010		BVTT+3-6	ABC
	87-067-703-010		TAPPING SCREW, BVT2+3-10	ABC
	87-078-019-010		S-SCREW,IT+4-6	ABC
	87-591-094-410		TAPPING SCREW, QIT+3-6	ABC
	87-721-095-410		QT2+3-8GLD W/O SLOT	ABC
	87-B10-190-010		BVT2+3-22 W/O SLOT	ABC
	87-064-185-010		HLDR,WIRE	ABC
	87-085-185-010		BUSHING, AC CORD (E)	ABC
	87-099-811-010		PLUG,ADPTR CONV(K)	.B
	88-904-151-110		FF-CABLE, 4P 1.25 150MM	.BC
	88-908-281-110		FF-CABLE, 8P 1.25 280MM	ABC
	88-910-071-110		FF-CABLE, 10P 1.25 70MM	ABC
	88-911-121-110		FF-CABLE,11P 1.25	ABC
C 181	87-018-131-080		CAP, CER 1000P-50V	.BC
C 182	87-018-131-080		CAP, CER 1000P-50V	.BC
FB 101	87-A90-978-010		F-BEAD,7.94-12.7-12.7 HF70RH	.BC
M 101	87-A91-232-010		FAN,F614R-12MC-22-350MM	ABC
PT 101	88-SP1-602-010		PT,HE	A
PT 101	88-SP1-603-010		PT,LH	
PT 101	88-SP1-604-010		PT,EZ	..C
PT 101	88-SP1-606-010		PT,K	.B
Q 217	87-A30-137-010		TR,2SD2494	ABC
Q 218	87-A30-137-010		TR,2SD2494	ABC
Q 219	87-A30-138-010		TR,2SB1625	ABC
Q 220	87-A30-138-010		TR,2SB1625	ABC
Q 223	87-A30-186-010		FET,2SK3053	ABC
Q 224	87-A30-186-010		FET,2SK3053	ABC
W 111	87-050-079-010		AC-CORD ASSY,E	ABC
	87-067-703-010		TAPPING SCREW, BVT2+3-10	ABC
W 101	8Z-SP1-627-010		F-CABLE,7P 2.5 280MM	ABC
WH 101	87-A90-460-010		HLDR,WIRE 2.5-7P	ABC
WH 102	87-A90-460-010		HLDR,WIRE 2.5-7P	ABC
	88-SX1-203-210		GUIDE,FL	ABC

ELECTRICAL MAIN PARTS LIST - 1/1 (DX-NH1100/DX-SNH1100)

NOTE: The characters in the suffix column indicate the part usage.

YJSM .....XX.....A.....
YSM .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
S 101	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 102	87-A90-095-080		SW,TACT EVQ11G04M	AB
	88-SX1-203-210		GUIDE,FL	AB
	8Z-SX1-202-010		GUIDE,LED OPE	AB
	8Z-SX1-203-010		GUIDE,LED DISC	AB
C 2	87-010-072-040		CAP,E 2.2-50 5L	AB
C 5	87-010-190-080		S CHIP F 0.01	AB
C 6	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 7	87-010-197-080		CAP, CHIP 0.01 DM	AB
C 4	87-010-246-040		CAP,E 47-35 SME	AB
C 1	87-010-264-040		CAP,E 100-10 5L	AB
C 8	87-010-314-080		C-CAP,S 22P-50V	AB
C 9	87-010-316-080		C-CAP,S 33P-50 CH	AB
C 11	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 12	87-010-197-080		CAP, CHIP 0.01 DM	AB
C 10	87-010-315-080		C-CAP,S 27P-50 CH	AB
C 14	87-010-405-040		CAP,E 10-50	AB
C 15	87-010-405-040		CAP,E 10-50	AB
C 202	87-010-197-080		CAP, CHIP 0.01 DM	AB
C 203	87-010-197-080		CAP, CHIP 0.01 DM	AB
C 201	87-018-134-080		CAPACITOR,TC-U 0.01-16	AB
C 252	87-010-178-080		CHIP CAP 1000P	AB
C 255	87-010-178-080		CHIP CAP 1000P	AB
C 251	87-010-178-080		CHIP CAP 1000P	AB
C 254	87-010-178-080		CHIP CAP 1000P	AB
C 253	87-010-178-080		CHIP CAP 1000P	AB
C 256	87-010-178-080		CHIP CAP 1000P	AB
C 304	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 305	87-010-197-080		CAP, CHIP 0.01 DM	AB
C 301	87-010-322-080		C-CAP,S 100P-50 CH	AB
C 313	87-010-184-080		CHIP CAPACITOR 3300P(K)	AB
C 314	87-010-402-040		CAP,E 2.2-50 SME	AB
C 312	87-016-462-080		C-CAP,S 1-16 F	AB
C 311	87-016-462-080		C-CAP,S 1-16 F	AB
C 310	87-016-462-080		C-CAP,S 1-16 F	AB
CN 2	87-099-559-010		CONN,13P TUC-P13X-B1	AB
CN 1	87-099-669-010		CONN,8P TUC-P8X-B1	AB
CN 301	87-009-241-010		CONNECTOR, 11P	AB
CN 303	87-099-015-010		CONN,13P 6216V	AB
CN 302	87-099-194-010		CONN,6P 6216V	AB
CN 305	87-099-570-010		CONN,13P TUC-P13P-B1	AB
CN 304	87-099-667-010		CONN,8P TUC-P8P-B1	AB
D 1	87-020-465-080		DIODE,1SS133 (110MA)	AB
D 2	87-070-136-080		ZENER,MTZJ5.1B	AB
D 3	87-070-136-080		ZENER,MTZJ5.1B	AB
FB 303	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 306	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 307	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 301	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 305	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 302	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 304	87-008-372-080		FILTER, EMI BL OIRNI	AB
FL 201	8Z-SX1-608-010		FL,6-BT-303GNK	AB
IC 1	8Z-SX1-607-010		C-IC,UPD78046HGF-024-3B9	AB
L 3	87-005-152-080		COIL,10UH	AB
L 5	87-005-152-080		COIL,10UH	AB
L 1	87-005-152-080		COIL,10UH	AB
L 2	87-005-152-080		COIL,10UH	AB
L 301	87-005-152-080		COIL,10UH	AB
L 302	87-005-165-080		COIL 1UH (H,E)	AB
LED 203	87-A40-263-080		LED,SLH-56PCT31 GRN	AB
LED 204	87-A40-263-080		LED,SLH-56PCT31 GRN	AB
LED 206	87-A40-317-080		LED,SLR-342VCT31 RED	AB
LED 205	87-A40-317-080		LED,SLR-342VCT31 RED	AB
LED 207	87-A40-317-080		LED,SLR-342VCT31 RED	AB
Q 2	87-026-263-080		C-TR,RN1410	AB
Q 302	87-A30-076-080		C-TR,2SC3052F	AB
Q 303	87-A30-076-080		C-TR,2SC3052F	AB
Q 304	87-A30-076-080		C-TR,2SC3052F	AB
S 203	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 207	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 208	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 201	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 204	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 205	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 206	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 202	87-A90-095-080		SW,TACT EVQ11G04M	AB
W 3	88-SX1-610-010		CORD,FG 11P	AB
X 1	87-A70-075-080		VIB,CER 4.19MHZ CRHF	AB

SCHEMATIC DIAGRAM – 6 (DX-NH1100/DX-SNH1100 : MAIN / FRONT)

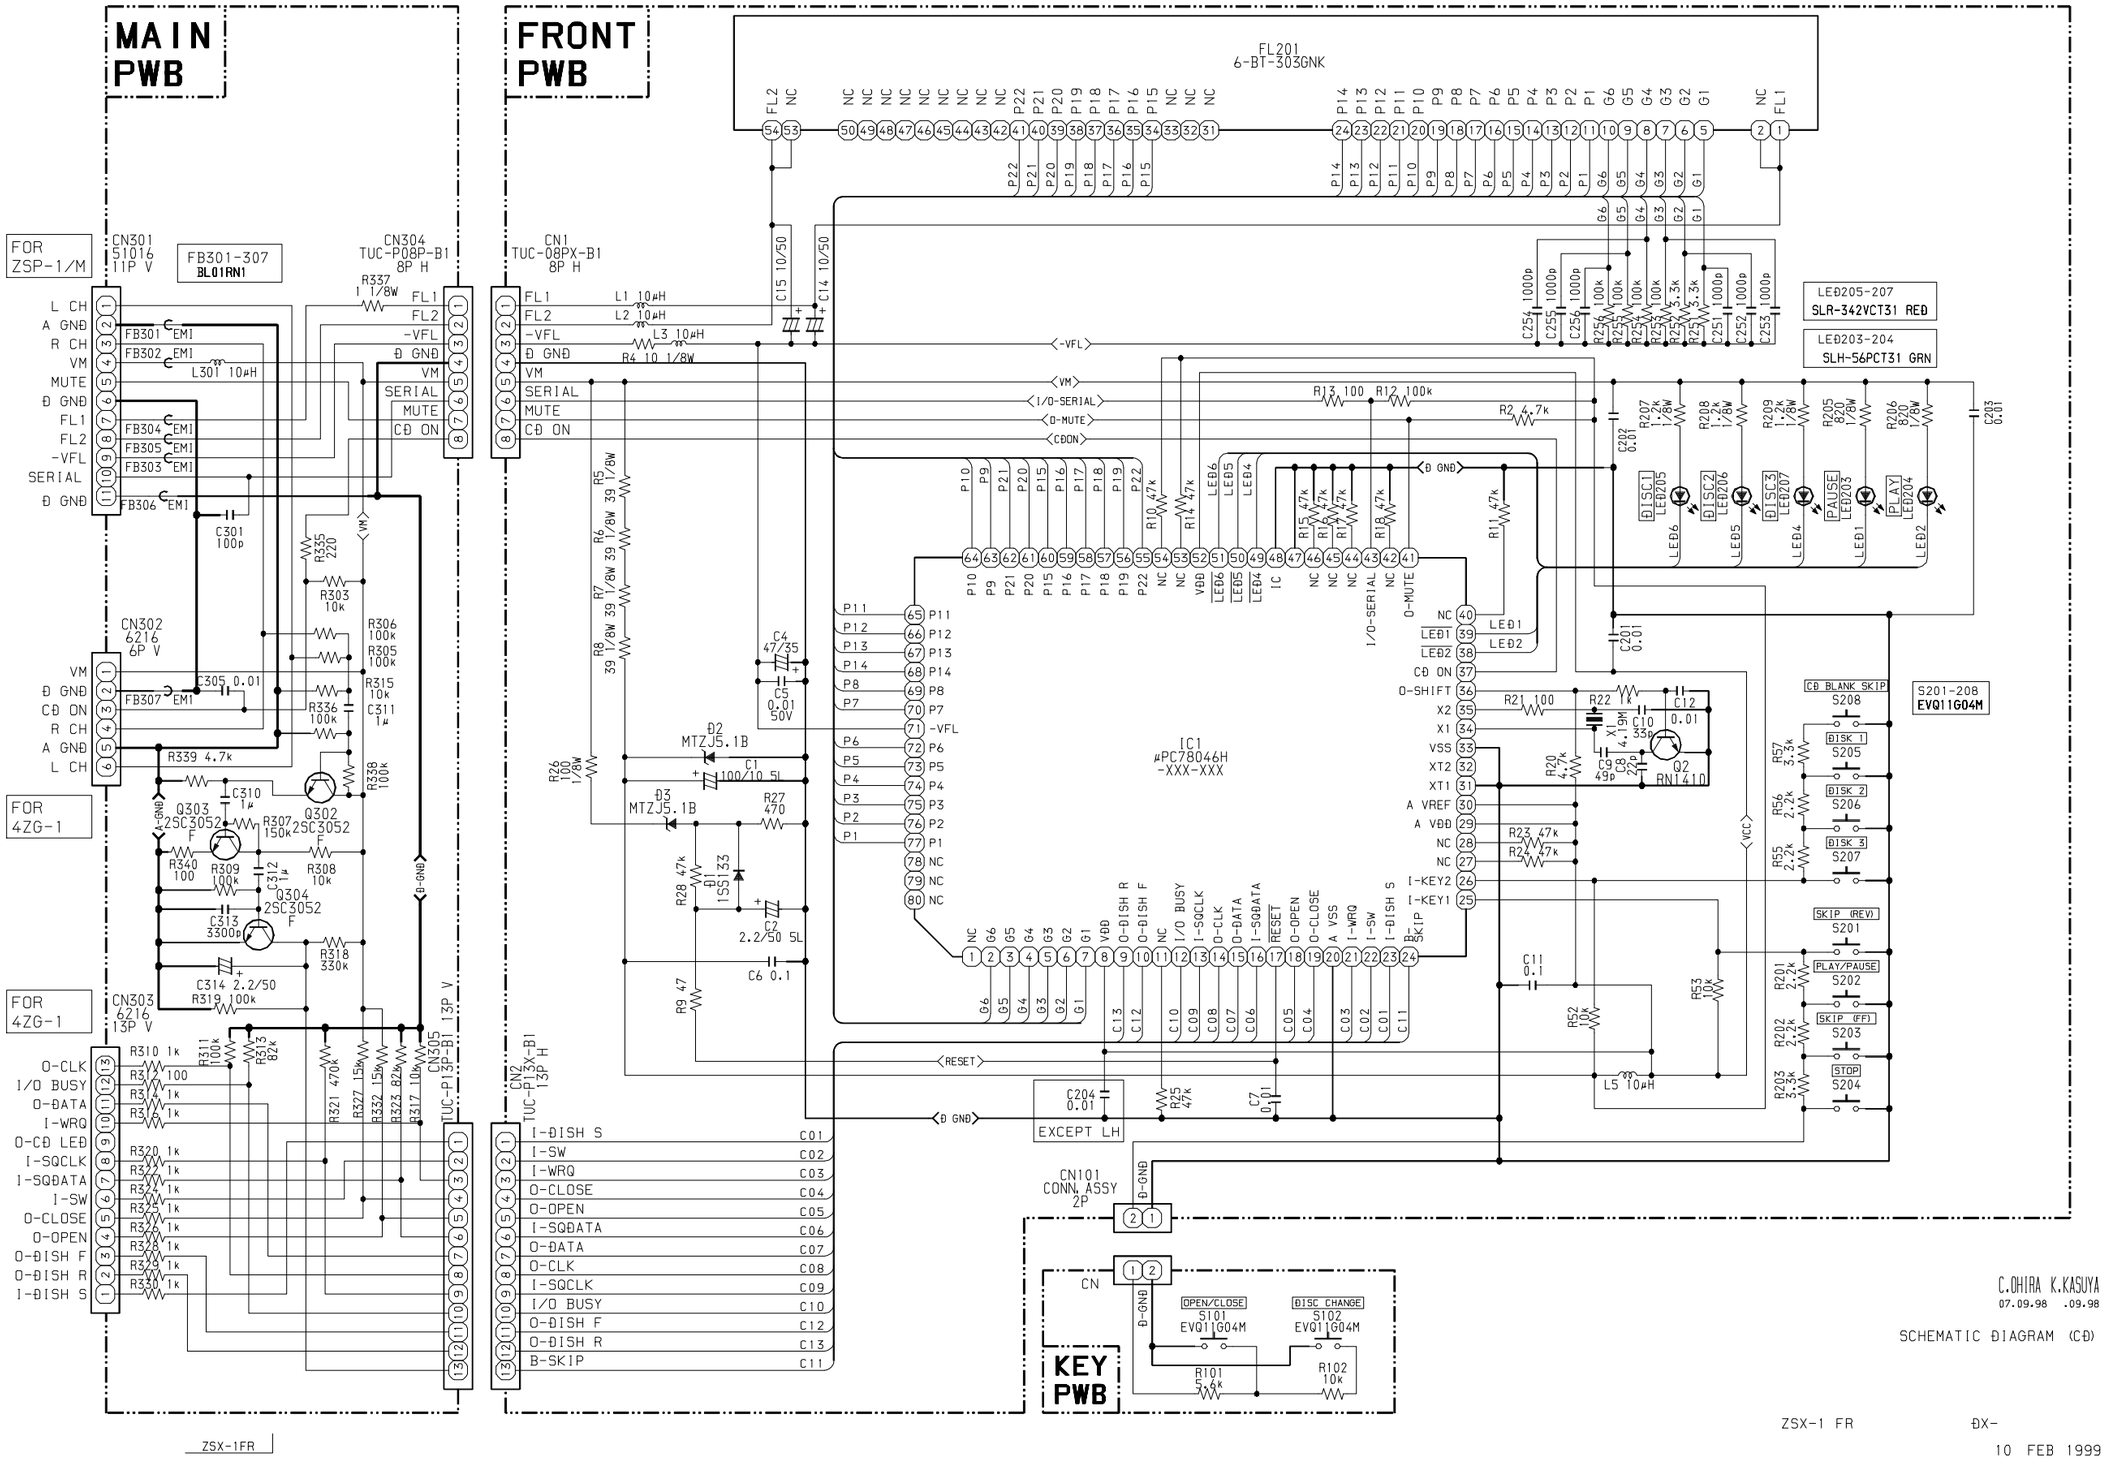

MECHANICAL PARTS LIST - 1/1 (DX-NH1100/DX-SNH1100)

NOTE: The characters in the suffix column indicate the part usage.

YJSM .....XX.....A.....
YSM .....XX.....B.....

REF.NO		PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
		87-B00-002-010		BADGE,AIWA 30 ABS SIL	AB
		8Z-SX1-001-010		CABI,FR	AB
		8Z-SX1-010-010		CABI,REAR YLSM	
		8Z-SX1-011-010		PANEL,SIDE L	AB
		8Z-SX1-012-010		PANEL,SIDE R	AB
		8Z-SX1-013-010		CABI,STEEL	AB
		8Z-SX1-016-010		CABI,REAR YJSM	A
		8Z-SX1-017-010		CABI,REAR YSM	.B
		8Z-SX1-021-010		CABI,STEEL	
		8Z-SX1-004-010		KEY,OPEN	AB
		8Z-SX1-005-010		KEY,DISC	AB
		8Z-SX1-008-010		KEY,ASSY OPE	AB
		8Z-SX1-009-010		REFLECTOR,DISC	AB
		8Z-SX1-002-010		PANEL,TRAY	AB
		8Z-SX1-003-010		WINDOW,CD	AB
		84-ZG1-245-210		CAP,OPTICAL	AB
		8Z-SX1-201-010		HLDR,CD	AB
		87-067-633-010		TAPPING SCREW, BVT2+3-8	
		87-067-703-010		TAPPING SCREW, BVT2+3-10	AB
		87-721-097-410		QT2+3-12 GLD	AB
		87-B10-091-010		UTT2+3-10 W/O BLK	AB
W	2	88-906-481-110		FF-CABLE, 6P 1.25 480MM	AB
W	1	88-913-121-110		FF-CABLE,P1.25	AB
		88-SX1-203-210		GUIDE,FL	AB
		8Z-SX1-202-010		GUIDE,LED OPE	AB
		8Z-SX1-203-010		GUIDE,LED DISC	AB
W	3	88-SX1-610-010		CORD,FG 11P	AB

ELECTRICAL MAIN PARTS LIST - 1/2 (FX-NH1100/FX-SNH1100)

NOTE: The characters in the suffix column indicate the part usage.

YJSM .....XX.....A.....
YSM .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
*	8Z-SW1-203-010		GUIDE,LED OPE	AB
*	8Z-SW1-204-010		GUIDE,LED REC	AB
*	8Z-SW1-205-010		GUIDE,LED CASS 1	AB
*	8Z-SW1-206-010		GUIDE,LED CASS 2	AB
CN 703	87-A60-060-010		CONN,07P V 9604S-07C	AB
CN 701	87-A60-062-010		CONN,05P V 9604S-05C	AB
D 702	87-002-787-080		LED,SEL 6215S RED	AB
D 701	87-070-278-010		LED,SLZ-738A-24-S	AB
D 714	87-070-278-010		LED,SLZ-738A-24-S	AB
D 712	87-A40-496-040		LED,SLR-342MCT31 GRN	AB
D 713	87-A40-496-040		LED,SLR-342MCT31 GRN	AB
D 711	87-A40-496-040		LED,SLR-342MCT31 GRN	AB
S 704	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 702	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 703	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 701	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 713	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 715	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 712	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 714	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 711	87-A90-095-080		SW,TACT EVQ11G04M	AB
C 603	87-010-101-080		CAP, ELECT 220-16	AB
C 609	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 605	87-010-198-080		CAP, CHIP 0.022	AB
C 604	87-010-237-080		CAP, ELECT 1000-16V	AB
C 607	87-010-263-080		CAP, ELECT 100-10V	AB
C 602	87-010-381-080		CAP, ELECT 330-16V	AB
C 606	87-010-404-080		CAP, ELECT 4.7-50V	AB
C 601	87-015-997-090		CAP,E 2200-16 SME	AB
C 614	87-010-197-080		CAP, CHIP 0.01 DM	AB
C 611	87-010-312-080		C-CAP,S 15P-50 CH	AB
C 612	87-010-315-080		C-CAP,S 27P-50 CH	AB
C 610	87-010-318-080		C-CAP,S 47P-50 CH	AB
C 613	87-010-404-080		CAP, ELECT 4.7-50V	AB
CN 501	87-099-750-010		CONN,15P V 9604SC	AB
CN 704	87-A60-060-010		CONN,07P V 9604S-07C	AB
CN 702	87-A60-062-010		CONN,05P V 9604S-05C	AB
D 602	87-017-931-080		ZENER,MTZJ5.6B	AB
D 603	87-017-931-080		ZENER,MTZJ5.6B	AB
D 604	87-020-465-080		DIODE,1SS133 (110MA)	AB
FB 301	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 601	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 602	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 603	87-008-372-080		FILTER, EMI BL OIRNI	AB
FB 604	87-A90-923-010		F-BEAD,8-13-14 E1314MRT	.B
IC 601	8Z-SW1-608-040		IC,M38503M4-088FP T4	AB
L 601	87-005-130-080		COIL,10UH	AB
L 603	87-005-130-080		COIL,10UH	AB
Q 603	87-026-263-080		C-TR,RN1410	AB
Q 609	87-A30-071-080		C-TR,RT1N 144C	AB
Q 605	87-A30-073-080		C-TR,RT1N 141C	AB
Q 604	87-A30-073-080		C-TR,RT1N 141C	AB
Q 606	87-A30-074-080		C-TR,RT1P 141C	AB
Q 608	87-A30-076-080		C-TR,2SC3052F	AB
Q 607	87-A30-076-080		C-TR,2SC3052F	AB
Q 602	87-A30-164-080		TR,CSC2001K	AB
Q 601	89-318-155-080		TR,2SC1815 (0.4W)	AB
Q 610	87-A30-076-080		C-TR,2SC3052F	AB
Q 801	87-A30-073-080		C-TR,RT1N 141C	AB
Q 802	87-A30-073-080		C-TR,RT1N 141C	AB
W 601	88-SW1-607-010		CORD,FG9P	AB
X 601	87-A70-120-080		VIB,8.00MHZ MTZ-TF01	AB
C 307	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 301	87-010-318-080		C-CAP,S 47P-50 CH	AB
C 302	87-010-318-080		C-CAP,S 47P-50 CH	AB
C 306	87-012-145-080		CAP, CHIP S 270P CH	AB
C 305	87-012-145-080		CAP, CHIP S 270P CH	AB
C 303	87-012-157-080		C-CAP,S 330P-50 CH	AB
C 304	87-012-157-080		C-CAP,S 330P-50 CH	AB
C 313	87-010-180-080		C-CER 1500P	AB
C 314	87-010-180-080		C-CER 1500P	AB
C 311	87-010-198-080		CAP, CHIP 0.022	AB
C 312	87-010-198-080		CAP, CHIP 0.022	AB
C 319	87-012-141-080		CHIP-CAPACITOR,0.22-16F	AB
C 318	87-012-142-080		CAP, S 0.33-16	AB
C 317	87-012-142-080		CAP, S 0.33-16	AB
C 324	87-010-260-080		CAP, ELECT 47-25V	AB
C 325	87-010-370-080		CAP,E 330-6.3 SME	AB
C 327	87-010-404-080		CAP, ELECT 4.7-50V	AB
C 328	87-010-404-080		CAP, ELECT 4.7-50V	AB
C 320	87-012-141-080		CHIP-CAPACITOR,0.22-16F	AB
C 322	87-012-141-080		CHIP-CAPACITOR,0.22-16F	AB
C 321	87-012-141-080		CHIP-CAPACITOR,0.22-16F	AB
C 339	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 337	87-010-196-080		CHIP CAPACITOR,0.1-25	AB

ELECTRICAL MAIN PARTS LIST - 2/2 (FX-NH1100/FX-SNH1100)

C	332	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	336	87-010-401-080	CAP, ELECT 1-50V	AB
C	335	87-010-401-080	CAP, ELECT 1-50V	AB
C	340	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	354	87-010-175-080	CAP 560P	.B
C	355	87-010-178-080	CHIP CAP 1000P	AB
C	358	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	359	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	356	87-010-260-080	CAP, ELECT 47-25V	AB
C	352	87-012-140-080	CAP 470P	AB
C	351	87-012-140-080	CAP 470P	AB
C	360	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	372	87-010-179-080	CAP,CHIP S B1200P	AB
C	374	87-010-179-080	CAP,CHIP S B1200P	AB
C	371	87-010-179-080	CAP,CHIP S B1200P	AB
C	373	87-010-179-080	CAP,CHIP S B1200P	AB
C	370	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	378	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	376	87-010-545-080	CAP, ELECT 0.22-50V	AB
C	375	87-010-545-080	CAP, ELECT 0.22-50V	AB
C	385	87-010-184-080	CHIP CAPACITOR 3300P(K)	AB
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	382	87-010-318-080	C-CAP,S 47P-50 CH	AB
C	384	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	399	87-010-197-080	CAP, CHIP 0.01 DM	AB
CN	301	87-049-919-010	CONN,3P EH V WHT	AB
D	352	87-A40-269-080	C-DIODE,MC2836	AB
D	361	87-020-465-080	DIODE,1SS133 (110MA)	AB
IC	302	87-A20-355-010	IC,CXA1553P	AB
IC	301	87-A20-455-010	IC,HA12211	AB
L	302	87-A50-049-010	COIL,TRAP 85K(COI)	AB
L	301	87-A50-049-010	COIL,TRAP 85K(COI)	AB
L	351	87-007-342-010	COIL,OSC 85K BIAS	AB
PIN	301	87-099-827-010	CONN,3P S2M-3W	AB
PIN	351	87-099-832-010	CONN,8P S2M-8W	AB
Q	359	87-026-610-080	TR,KTC3198GR	AB
Q	358	87-026-610-080	TR,KTC3198GR	AB
Q	357	87-026-610-080	TR,KTC3198GR	AB
Q	355	87-A30-074-080	C-TR,RT1P 141C	AB
Q	354	87-A30-087-080	C-FET,2SK2158	AB
Q	353	87-A30-087-080	C-FET,2SK2158	AB
Q	351	87-A30-087-080	C-FET,2SK2158	AB
Q	360	87-A30-073-080	C-TR,RT1N 141C	AB
Q	381	87-A30-076-080	C-TR,2SC3052F	AB
Q	382	87-A30-076-080	C-TR,2SC3052F	AB
SFR	303	87-024-355-080	SFR,33K DIA6 H	AB
SFR	302	87-024-355-080	SFR,33K DIA6 H	AB
SFR	301	87-024-355-080	SFR,33K DIA6 H	AB
SFR	304	87-024-355-080	SFR,33K DIA6 H	AB
SFR	305	87-024-356-080	SFR,47K DIA6 H	AB
SFR	306	87-024-356-080	SFR,47K DIA6 H	AB
SFR	351	87-024-356-080	SFR,47K DIA6 H	AB
SFR	352	87-024-356-080	SFR,47K DIA6 H	AB
D	501	87-A40-269-080	C-DIODE,MC2836	AB
Q	506	87-A30-073-080	C-TR,RT1N 141C	AB
Q	502	87-A30-085-070	C-TR,CSA1362GR	AB
Q	503	87-A30-085-070	C-TR,CSA1362GR	AB
Q	501	89-112-965-080	TR,2SA1296 (0.75W)	AB

SCHEMATIC DIAGRAM – 7 (FX-NH1100/FX-SNH1100 : MAIN / FRONT)

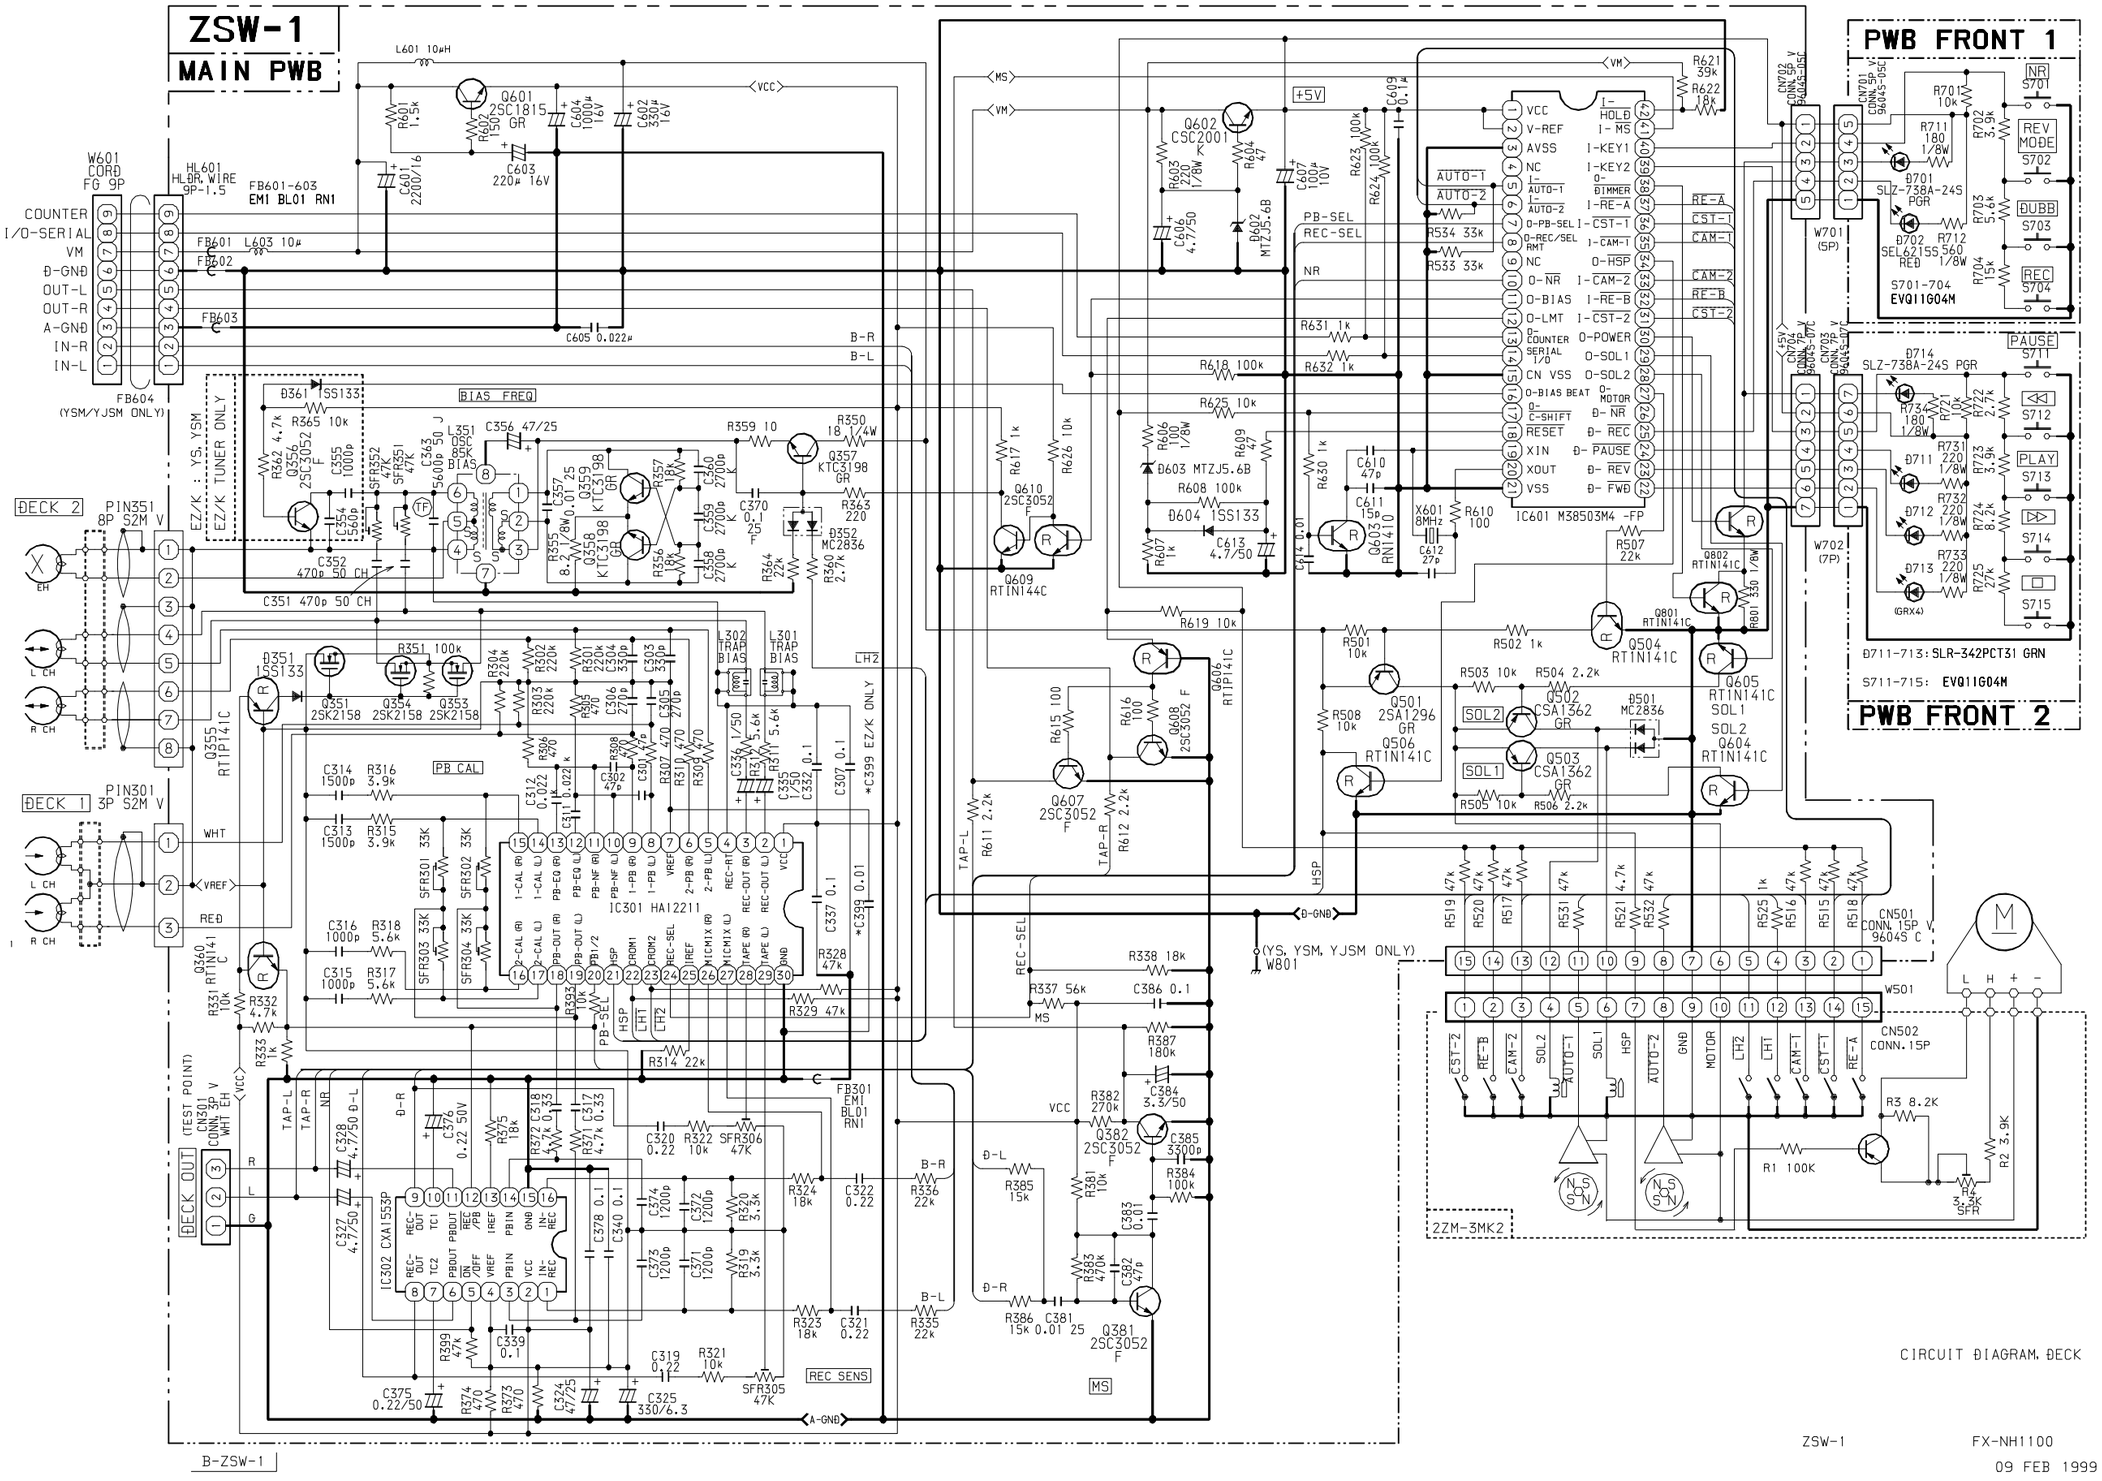

CIRCUIT ÐIAGRAM, ÐECK

MECHANICAL PARTS LIST - 1/1 (FX-NH1100/FX-SNH1100)

NOTE: The characters in the suffix column indicate the part usage.

YJSM .....XX.....A.....
YSM .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	87-B00-002-010		BADGE,AIWA 30 ABS SIL	AB
	8Z-SW1-001-010		CABI,FR	AB
	8Z-SW1-002-010		BOX,CASS 1	AB
	8Z-SW1-003-010		BOX,CASS 2	AB
	8Z-SW1-015-010		CABI,STEEL	AB
	8Z-SW1-016-010		PANEL,SIDE L	AB
	8Z-SW1-017-010		PANEL,SIDE R	AB
	8Z-SW1-018-010		CABI,REAR YLSM	
	8Z-SW1-020-010		CABI,REAR YJSM	A
	8Z-SW1-022-010		CABI,REAR YSM	.B
	8Z-SW1-024-010		CABI,STEEL	
	8Z-SW1-011-010		KEY,ASSY REC	AB
	8Z-SW1-012-010		KEY,ASSY OPE	AB
	81-532-080-010		LABEL, CASS. COMPT	AB
	8Z-SW1-004-010		WINDOW,CASS 1	AB
	8Z-SW1-005-010		WINDOW,CASS 2	AB
	8Z-SW1-013-010		REFLECTOR,CASS 1	AB
	86-NF5-618-110		CONN ASSY,8P RPB	AB
	82-NF5-218-010		SPR-T,EJECT 1 (SIN)	AB
	82-NF5-219-010		SPR-T,EJECT 2 (SIN)	AB
	82-NF5-229-010		PLATE,LOCK	AB
	86-NF9-224-010		SPR-C,LOCK	AB
	87-NF4-216-010		HLDR,LOCK 1	AB
	87-NF4-217-110		HLDR,LOCK 2	AB
	87-NF8-220-010		DMPR,150	AB
	8Z-SW1-201-010		COVER, REFLECTOR 1	AB
	8Z-SW1-202-010		COVER, REFLECTOR 2	AB
	87-067-579-010		TAPPING SCREW, BVT2+3-8	AB
	87-067-633-010		TAPPING SCREW, BVT2+3-8	
	87-067-703-010		TAPPING SCREW, BVT2+3-10	AB
	87-B10-091-010		UTT2+3-10 W/O BLK	AB
W 501	88-915-161-110		FF-CABLE, 15P 1.25	AB
W 701	88-905-331-110		FF-CABLE, 5P 1.25 330MM	AB
W 702	88-907-301-110		FF-CABLE, 7P 1.25	AB
W 601	88-SW1-607-010		CORD,FG9P	AB

ELECTRICAL MAIN PARTS LIST - 1/1 (GE-NH1100/GE-SNH1100)

NOTE: The characters in the suffix column indicate the part usage.

YJSM .....XX.....A.....
YSM .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
C 304	87-010-182-080		C-CAP,S 2200P-50 B	AB
C 302	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 301	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 303	87-010-197-080		CAP, CHIP 0.01 DM	AB
L 301	87-003-097-080		COIL,1UH	AB
S 312	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 315	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 314	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 311	87-A90-095-080		SW,TACT EVQ11G04M	AB
S 316	87-A91-076-010		SW,RTRY REO121PVB25FINA1	AB
C 108	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 109	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 105	87-010-312-080		C-CAP,S 15P-50 CH	AB
C 107	87-010-316-080		C-CAP,S 33P-50 CH	AB
C 106	87-010-320-080		CHIP CAP 68P	AB
C 103	87-010-497-040		CAP,E 4.7-35 GAS	AB
C 101	87-010-550-040		CAP,E 100-6.3 GAS	AB
C 111	87-010-552-040		CAP,E 22-16 GAS	AB
C 110	87-012-368-080		C-CAP,S 0.1-50 F	AB
D 102	87-017-931-080		ZENER,MTZJ5.6B	AB
D 103	87-020-465-080		DIODE,1SS133 (110MA)	AB
D 101	87-070-136-080		ZENER,MTZJ5.1B	AB
FB 101	87-008-372-080		FILTER, EMI BL OIRNI	AB
IC 101	8Z-SU1-603-010		IC,LC866448W-XXXX	AB
L 102	87-005-130-080		COIL,10UH	AB
L 103	87-005-130-080		COIL,10UH	AB
L 101	87-005-152-080		COIL,10UH	AB
L 104	87-005-152-080		COIL,10UH	AB
Q 101	87-026-263-080		C-TR,RN1410	AB
W 101	8Z-SU1-608-010		CORD,52305-101BLK	AB
WH 101	87-A90-882-010		HLDR,WIRE 10P 1.5 51016	AB
X 101	87-A70-070-080		VIB,CER 5.76MHZ CRHF	AB
	88-SU1-201-110		GUIDE,FL	AB
C 203	87-010-404-040		CAP,E 4.7-50 SME	AB
C 204	87-010-405-040		CAP,E 10-50	AB
C 205	87-010-405-040		CAP,E 10-50	AB
C 206	87-010-405-040		CAP,E 10-50	AB
C 201	87-012-140-080		CAP 470P	AB
C 202	87-012-369-080		C-CAP,S 0.047-50F	AB
FL 201	8Z-SU1-605-010		FL,BJ699GK	AB
LED 208	87-A40-380-080		LED,SEL6510C-TP5 GRN	AB
LED 207	87-A40-380-080		LED,SEL6510C-TP5 GRN	AB
LED 202	87-A40-380-080		LED,SEL6510C-TP5 GRN	AB
LED 201	87-A40-380-080		LED,SEL6510C-TP5 GRN	AB
LED 204	87-A40-380-080		LED,SEL6510C-TP5 GRN	AB
LED 206	87-A40-380-080		LED,SEL6510C-TP5 GRN	AB
LED 203	87-A40-380-080		LED,SEL6510C-TP5 GRN	AB
LED 205	87-A40-380-080		LED,SEL6510C-TP5 GRN	AB
C 404	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 401	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 402	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 406	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 403	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 407	87-012-158-080		C-CAP,S 390P-50 CH	AB
C 405	87-012-358-080		C-CAP,S 0.47-10 F Z	AB
IC 401	87-A21-023-040		C-IC,BA3835F	AB

SCHEMATIC DIAGRAM – 8 (GE-NH1100/GE-SNH1100 : MAIN)

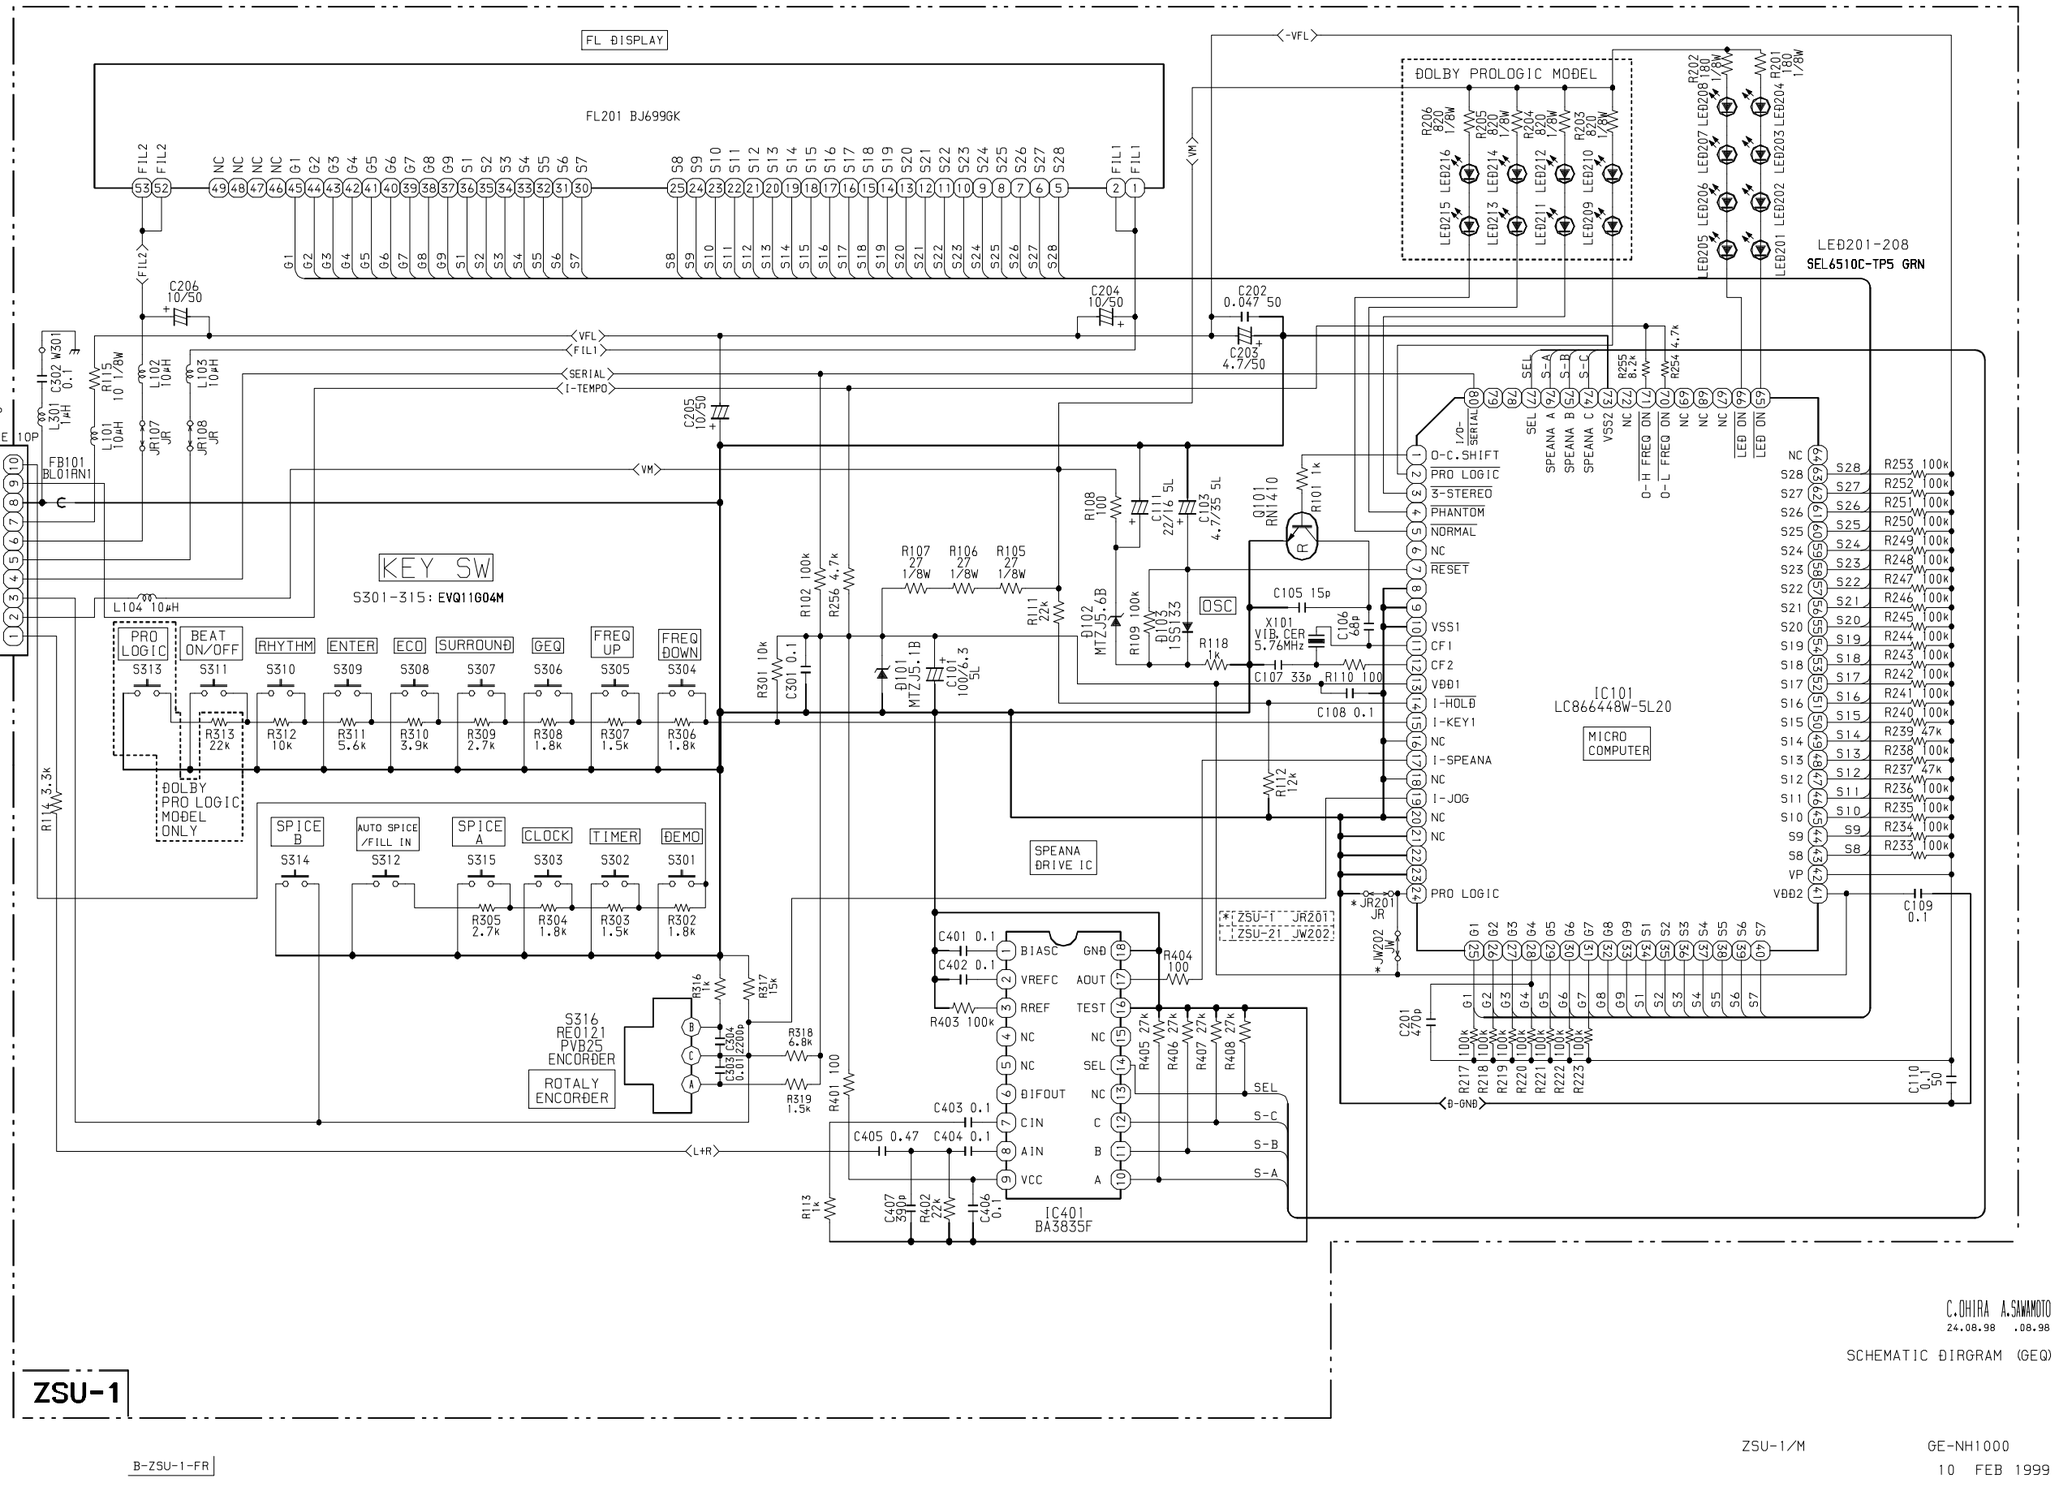

MECHANICAL PARTS LIST - 1/1 (GE-NH1100/GE-SNH1100)

NOTE: The characters in the suffix column indicate the part usage.

YJSM .....XX.....A.....
YSM .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	82-NE6-067-010		BADGE,AIWA 30N	.....
	87-B00-002-010		BADGE,AIWA 30 ABS SIL	AB.....
	8Z-SU1-001-010		CABI,FR	AB.....
	8Z-SU1-002-010		CABI,STEEL	AB.....
	8Z-SU1-003-010		CABI,REAR YJSNM	A.....
	8Z-SU1-021-010		CABI,REAR YSNM	.B.....
	8Z-SU1-022-010		CABI,REAR YLSNM	.....
	8Z-SX1-011-010		PANEL,SIDE L	AB.....
	8Z-SX1-012-010		PANEL,SIDE R	AB.....
	8Z-SU1-005-010		REFLECTOR,JOG	AB.....
	8Z-SU1-006-010		RING,JOG	AB.....
	8Z-SU1-007-010		KNOB,RTRY JOG	AB.....
	8Z-SU1-008-010		KEY,GEQ	AB.....
	8Z-SU1-009-010		KEY,DEMO	AB.....
	8Z-SU1-010-010		KEY,ENTER	AB.....
	8Z-SU1-004-010		WINDOW,DISPLAY	AB.....
	87-067-633-010		TAPPING SCREW, BVT2+3-8	AB.....
	87-067-703-010		TAPPING SCREW, BVT2+3-10	AB.....
W 101	8Z-SU1-608-010		CORD,52305-101BLK	AB.....
WH 101	87-A90-882-010		HLDR,WIRE 10P 1.5 51016	AB.....
	88-SU1-201-110		GUIDE,FL	AB.....

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

HRJSM .....XX.....A.....
KSM .....XX.....B.....
EZSM .....XX.....C.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	8Z-SP1-901-010		IB,H(ECA)M	A.....
	8Z-SP1-902-010		IB,LH(ESP)M	.....
	8Z-SP1-905-010		IB,K(E)M	.B.....
	8Z-SP1-906-010		IB,EZ(9L)M	..C.....
	87-006-225-010		AM LOOP ANT NC2	.BC.....
	87-043-095-010		WIRE ANTENNA	A.....
	87-043-106-010		WIRE, FM ANT (Z)	.BC.....
	87-043-115-010		ANT,FEEDER FM	A.....
	87-A91-017-010		PLUG,CONVERSION JT-0476	A.....
	8Z-NF5-702-010		RC UNIT,RC-ZAS04	ABC.....
ANT 1	87-006-269-010		AM LOOP ANT (UN)	A.....

サービス技術ニュース	
番号	連絡内容
G－　－	
G－　－	
G－　－	

アイワ株式会社
AIWA CO.,LTD.

9820543

Tokyo Japan

〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 （代表）

Printed in Singapore